

Company Directive

STANDARD TECHNIQUE: SD8B/3 (Part 5)

Relating to 132kV Underground Cable Ratings


Policy Summary

This document contains 132kV cable ratings of the various types of 132kV cables used within Western Power Distribution South West and South Wales areas. It assumes that the cables will be subjected to the cyclic load as given by the load curve shown in figure one. If other load curves are required contact the Company Cable Engineer.

This Standard Technique should be used when designing any 132kV electricity distribution network that has underground cables in it.

Author: Peter White

Implementation Date: March 2009

Approved by 
Policy Manager

Date: 30-03-09

1.0 INTRODUCTION

This Standard Technique replaces Standard Technique ST: SD 8B/2.

This Part 5 document of ST: SD 8B sets out the all the WPD, 132kV underground cable Sustained ratings and Cyclic ratings for winter, spring, summer and autumn which are to be applied. These ratings are based on Crater for HV polymeric Cables, Crater for Oil filled cables and Crater for gas cables.

2.0 UNDERGROUND CABLES

The main factors governing the rating of underground cables are: -

Maximum depth of lay;

Soil thermal resistivity T_r (g);

Ground ambient temperature ($^{\circ}\text{C}$);

Air ambient temperature ($^{\circ}\text{C}$);

Cyclic loading conditions;

Maximum permissible conductor temperature;

Proximity to other cables;

Whether the cable is laid direct in the ground, in ducts or in air.

Duct dimensions

3.0 CRITERIA

3.1 General criteria for 132kV cables (applies to Oil filled, Gas cables, EPR and XLPE cables)

A winter soil resistivity of 0.9°Cm/W and a summer soil resistivity of 1.2°Cm/W are considered realistic for the South West and South Wales, although the possibility of localised higher values may need to be taken into account. To control the thermal resistivity of the surrounding medium then the best example would be to use cement bound sand (CBS) backfill for a cable route, but this is expensive. Generally crushed Limestone dust or crushed Granite dust 3mm to dust is suitable as this gives a T_r of 1.2°Cm/W .

Ground ambient temperatures across the South West and South Wales vary between 7°C in the winter and 15°C in the summer. These values apply in most locations, but winter ground temperatures in the city centres such as Bristol, Cardiff, Exeter, Plymouth and Swansea will be about 2°C higher.

3.2 The current ratings quoted in this document are maximum values based on balanced loads.

- 3.3 The current ratings quoted apply to cables supplying loads, during the requisite season.
- 3.4 The current ratings specified are to be adjusted where the conditions are known to vary from those quoted in this instruction i.e. high summer loads or grouping.
- 3.5 The maximum conductor temperature for oil filled and gas filled cable is 85°C. The maximum conductor temperature for EPR and XLPE cables is 90°C.
- 3.6 When two or more cables or trefoil groups are laid in the same trench then a derating factor needs to be applied to both circuits. The amount of derating is dependant upon the spacing of the circuits. All spacing distances quoted in this document are **centre-to-centre** spacing's of the cables or trefoil groups.
- 3.7 Only 132kV Ratings are now included in this document.
- 3.8 The ratings are detailed as **Sustained** - Winter, Spring, Summer and Autumn; **Cyclic** - Winter, Spring, Summer and Autumn; for each of the cable types included in this document.
- 3.9 Each cable type for which ratings have been generated the typical assumed installation conditions are given in the formation shown below: -

Depth of lay 1m;

Soil resistivity of 0.9°Cm/W;

Ground ambient temperature of 10°C;

Maximum conductor temperature of 85°C for 132kV for 3 core Oil filled cables and 85°C for 132kV single core Oil and Gas filled cables. All polymeric cables e.g. EPR and XLPE have a maximum conductor temperature of 90°C.

No allowance made for grouping of cable circuits.

4.0 DEFINITIONS

All 132kV EPR and XLPE single core circuits have been assumed in the first instance to be three single-core oil filled, gas filled or polymeric cables are laid touching, throughout their length, in trefoil formation. In the second instance the cables are laid flat spaced with the spacing set at 2D and the cables are cross bonded.

Note: - All single point bonded circuits must have an earth continuity conductor (ECC) between both ends of the circuit for the flow of fault current. For the csa of the ECC and if there any other queries then contact the Company Cable Engineer at Avonbank.

4.1 Sustained, Continuous or Steady-State rating

The sustained rating is the maximum current that can be carried, in defined conditions, without the assumed maximum conductor temperature being exceeded.

4.2 **Cyclic rating**

A cyclic rating is the maximum current that maybe carried during the prolonged application of a succession of identical 24-hour load cycles, without the assumed maximum conductor temperature being exceeded.

4.3 **Utilisation factor**

This does not apply with 132kV cables.

4.4 **Load Factor**

The ratio of the number of units supplied during a given period, to the number of units that would be supplied, had the maximum demand been maintained throughout that period. This is usually expressed as a percentage.

4.5 **Soil thermal conductivity**

The soil thermal conductivity is the thermal transmission in unit time through unit area of homogeneous soil of unit thickness, when unit difference of temperature is established between its surfaces.

4.6 **Soil thermal resistivity**

The ratings given are calculated for a damp thermal resistivity, which is suitable for rating cables for winter-peak loads.

4.7 **Ground ambient temperature**

Where a cable circuit carries a sustained load and does not have a seasonal variation it should be rated for the maximum summer value of ground temperature.

4.8 **Ducts**

A duct up to 15m in length can be used without derating the cable. Two or more duct lengths can be used on a section, provided that there is no more than 30m of duct in a particular 250m cable section and that there is a minimum of 10m separation between each duct length. See the example given below.

Example of two 15m-duct lengths in a 250m-cable section.

The correct duct rating shall be used if 15m or more of continuous duct is installed on a particular 250m-cable section. This rating is dependant upon the type of ducting used, for this reason the ratings given in the tables contain values for both smooth walled "PVC" and "Rigiduct" (Rigiduct is a twin walled duct) type ducting.

The rating of the cable section can be restored if the ducts are bentonited after the cables have been installed. To ensure the thermal equivalence to the direct buried parts of the route, the ducts shall be completely filled with a bentonite-sand-cement mixture.

The filling medium shall be prepared by adding 20 parts of sand and 8 parts of cements, by weight, to 100 parts of a 10:1 water/bentonite mixture.

Note: - Provided the bentonite is sealed into the duct with duct seals, and then the bentonite forms a gel, which is stabilized by the cement, and the addition of sand increases the load-bearing properties of the mixture. Should it be necessary to remove this mixture, it may be flushed out of the ducts by using high-pressure water jets.

Ducts, which are filled with a bentonite mixture, shall be installed wherever possible in a concrete surround but if not, any joints in the duct run must be effectively sealed. At the duct ends, the gap around the cable must be effectively sealed to prevent migration of the bentonite mixture and preserve its moisture content under service conditions.

In general duct lengths of up to 100m can be filled where a standard 150mm nominal bore duct is installed.

4.9 Cables exposed to the sun

To reduce the effect of solar radiation it is recommended that cables should be shielded from direct rays of the sun without restriction of ventilation.

4.10 Effects of grouping of cables

No allowance has been made for grouping in the ratings listed in the tables. Contact the Company Cable Engineer in Avonbank for various grouping arrangements.

When two or more circuits of the same voltage are laid in close proximity the ratings of the cables must be reduced by multiply the group-rating factor given in Table 1 with the relevant cable rating selected from this document. It should be noted that if thermally independence of both the circuits is required, then the circuits need a centre-to-centre spacing of 2.5m.

All spacing quoted in Table 1, are a centre-to-centre spacing for the relevant circuits.

4.11 Loading Conditions

All the ratings listed in this document are calculated for a particular typical domestic/commercial daily load curve, having a loss load factor of 0.5. See Figure 1 for the load curve.

Ratings given for cables installed in air and clipped direct to a wall are the steady-state ratings. Cables installed in this manner do NOT have a Cyclic rating just their sustained or steady state current rating.

5.0 FURTHER GUIDANCE

If required, further guidance should be sought from the Company Cable Engineer, Policy Section, Avonbank, Feeder Road, Bristol where necessary.

5.1 INDEX

| TABLE | DESCRIPTION |
|----------|---|
| Table 1 | Group Derating Factors for Circuits. |
| Figure 1 | Typical Load Curve G. |
| A1 win | 132kV XLPE Lead Sheath and MDPE oversheath Trefoil - WINTER – Sustained and Cyclic Current Ratings. |
| A2 spr | 132kV XLPE Lead Sheath and MDPE oversheath Trefoil- SPRING - Sustained and Cyclic Current Ratings. |
| A3 sum | 132kV XLPE Lead Sheath and MDPE oversheath Trefoil - SUMMER - Sustained and Cyclic Current Ratings. |
| A4 aut | 132kV XLPE Lead Sheath and MDPE oversheath Trefoil - AUTUMN - Sustained and Cyclic Current Ratings. |
| B1 win | 132kV XLPE Lead Sheath and MDPE oversheath Flat Spaced - WINTER – Sustained and Cyclic Current Ratings. |
| B2 spr | 132kV XLPE Lead Sheath and MDPE oversheath Flat Spaced - SPRING - Sustained and Cyclic Current Ratings. |
| B3 sum | 132kV XLPE Lead Sheath and MDPE oversheath Flat Spaced - SUMMER - Sustained and Cyclic Current Ratings. |
| B4 aut | 132kV XLPE Lead Sheath and MDPE oversheath Flat Spaced - AUTUMN - Sustained and Cyclic Current Ratings. |
| C1 win | 132kV XLPE Cu. Wire and lead sheath MDPE Trefoil - WINTER – Sustained and Cyclic Current Ratings. |
| C2spr | 132kV XLPE Cu. Wire and lead sheath MDPE Trefoil - SPRING - Sustained and Cyclic Current Ratings. |
| C3 sum | 132kV XLPE Cu. Wire and lead sheath MDPE Trefoil - SUMMER - Sustained and Cyclic Current Ratings. |
| C4 aut | 132kV XLPE Cu. Wire and lead sheath MDPE Trefoil - AUTUMN - Sustained and Cyclic Current Ratings. |
| D1 win | 132kV XLPE Cu. Wire and lead sheath MDPE Flat Spaced - WINTER – Sustained and Cyclic Current Ratings. |
| D2 spr | 132kV XLPE Cu. Wire and lead sheath MDPE Flat Spaced - SPRING - Sustained and Cyclic Current Ratings. |
| D3 sum | 132kV XLPE Cu. Wire and lead sheath MDPE Flat Spaced - SUMMER - Sustained and Cyclic Current Ratings. |
| D4 aut | 132kV XLPE Cu. Wire and lead sheath MDPE Flat Spaced - AUTUMN - Sustained and Cyclic Current Ratings. |
| E1 win | 132kV three core ducted Oil Filled Lead sheath (metric) cable - WINTER – Sustained & Cyclic Current Ratings. |
| E2 spr | 132kV three core ducted Oil Filled Lead sheath (metric) cable - SPRING - Sustained & Cyclic Current Ratings. |
| E3 sum | 132kV three core ducted Oil Filled Lead sheath (metric) cable - SUMMER - Sustained & Cyclic Current Ratings. |
| E4 aut | 132kV three core ducted Oil Filled Lead sheath (metric) cable - AUTUMN - Sustained & Cyclic Current Ratings. |
| F1 win | 132kV three core ducted Oil Filled Lead sheath (imperial) cable - WINTER – Sustained & Cyclic Current Ratings. |
| F2 spr | 132kV three core ducted Oil Filled Lead sheath (imperial) cable - SPRING - Sustained & Cyclic Current Ratings. |
| F3 sum | 132kV three core ducted Oil Filled Lead sheath (imperial) cable - SUMMER - Sustained & Cyclic Current Ratings. |
| F4 aut | 132kV three core ducted Oil Filled Lead sheath (imperial) cable - AUTUMN - Sustained & Cyclic Current Ratings. |
| G1 win | 132kV three core ducted Oil Filled CAS sheath cable (metric) - WINTER – Sustained & Cyclic Current Ratings. |
| G2 spr | 132kV three core ducted Oil Filled CAS sheath cable (metric) - SPRING – Sustained & Cyclic Current Ratings. |
| G3 sum | 132kV three core ducted Oil Filled CAS sheath cable (metric) - SUMMER – Sustained & Cyclic Current Ratings. |
| G4 aut | 132kV three core ducted Oil Filled CAS sheath cable (metric) - AUTUMN – Sustained & Cyclic Current Ratings. |

TABLE

DESCRIPTION


| | |
|--------|--|
| H1 win | 132kV single core ducted Oil Filled Lead sheath (metric) cable Trefoil- WINTER – Sustained & Cyclic Current Ratings. |
| H2 spr | 132kV single core ducted Oil Filled Lead sheath (metric) cable Trefoil - SPRING - Sustained & Cyclic Current Ratings. |
| H3 sum | 132kV single core ducted Oil Filled Lead sheath (metric) cable Trefoil - SUMMER - Sustained & Cyclic Current Ratings. |
| H4 aut | 132kV single core ducted Oil Filled Lead sheath (metric) cable Trefoil - AUTUMN - Sustained & Cyclic Current Ratings. |
| J1win | 132kV single core ducted Oil Filled Lead sheath (imperial) cable Trefoil- WINTER – Sustained & Cyclic Current Ratings. |
| J2 spr | 132kV single core ducted Oil Filled Lead sheath (imperial) cable Trefoil- SPRING - Sustained & Cyclic Current Ratings. |
| J3 sum | 132kV single core ducted Oil Filled Lead sheath (imperial) cable Trefoil- SUMMER - Sustained & Cyclic Current Ratings. |
| J4 aut | 132kV single core ducted Oil Filled Lead sheath (imperial) cable Trefoil- AUTUMN - Sustained & Cyclic Current Ratings. |
| K1 win | 132kV single core ducted Oil Filled Lead sheath (metric) cable Flat spaced- WINTER – Sustained & Cyclic Current Ratings. |
| K2 spr | 132kV single core ducted Oil Filled Lead sheath (metric) cable Flat spaced - SPRING - Sustained & Cyclic Current Ratings. |
| K3 sum | 132kV single core ducted Oil Filled Lead sheath (metric) cable Flat spaced- SUMMER - Sustained & Cyclic Current Ratings. |
| K4 aut | 132kV single core ducted Oil Filled Lead sheath (metric) cable Flat spaced- AUTUMN - Sustained & Cyclic Current Ratings. |
| L1 win | 132kV single core ducted Oil Filled Lead sheath (imperial) cable Flat spaced- WINTER – Sustained & Cyclic Current Ratings. |
| L2 spr | 132kV single core ducted Oil Filled Lead sheath (imperial) cable Flat spaced - SPRING - Sustained & Cyclic Current Ratings. |
| L3 sum | 132kV single core ducted Oil Filled Lead sheath (imperial) cable Flat spaced- SUMMER - Sustained & Cyclic Current Ratings. |
| L4 aut | 132kV single core ducted Oil Filled Lead sheath (imperial) cable Flat spaced- AUTUMN - Sustained & Cyclic Current Ratings. |
| M1 win | 132kV single core ducted Oil Filled CAS sheath cable (metric) Trefoil - WINTER – Sustained & Cyclic Current Ratings. |
| M2 spr | 132kV single core ducted Oil Filled CAS sheath cable (metric) Trefoil - SPRING – Sustained & Cyclic Current Ratings. |
| M3 sum | 132kV single core ducted Oil Filled CAS sheath cable (metric) Trefoil - SUMMER – Sustained & Cyclic Current Ratings. |
| M4 aut | 132kV single core ducted Oil Filled CAS sheath cable (metric) Trefoil - AUTUMN – Sustained & Cyclic Current Ratings. |
| N1 win | 132kV single core ducted Oil Filled CAS sheath cable (imperial) Trefoil - WINTER – Sustained & Cyclic Current Ratings. |
| N2 spr | 132kV single core ducted Oil Filled CAS sheath cable (imperial) Trefoil - SPRING – Sustained & Cyclic Current Ratings. |
| N3 sum | 132kV single core ducted Oil Filled CAS sheath cable (imperial) Trefoil - SUMMER – Sustained & Cyclic Current Ratings. |
| N4 aut | 132kV single core ducted Oil Filled CAS sheath cable (imperial) Trefoil - AUTUMN – Sustained & Cyclic Current Ratings. |
| O1 win | 132kV single core ducted Oil Filled CAS sheath cable (metric) Flat spaced - WINTER – Sustained & Cyclic Current Ratings. |
| O2 spr | 132kV single core ducted Oil Filled CAS sheath cable (metric) Flat spaced - SPRING – Sustained & Cyclic Current Ratings. |
| O3 sum | 132kV single core ducted Oil Filled CAS sheath cable (metric) Flat spaced - SUMMER – Sustained & Cyclic Current Ratings. |
| O4 aut | 132kV single core ducted Oil Filled CAS sheath cable (metric) Flat spaced - AUTUMN – Sustained & Cyclic Current Ratings. |
| P1 win | 132kV single core ducted Oil Filled CAS sheath cable (imperial) Flat spaced - WINTER – Sustained & Cyclic Current Ratings. |
| P2 spr | 132kV single core ducted Oil Filled CAS sheath cable (imperial) Flat spaced- SPRING – Sustained & Cyclic Current Ratings. |

TABLE**DESCRIPTION**

| | |
|--------|---|
| P3 sum | 132kV single core ducted Oil Filled CAS sheath cable (imperial) Flat spaced - SUMMER – Sustained & Cyclic Current Ratings. |
| P4 aut | 132kV single core ducted Oil Filled CAS sheath cable (imperial) Flat spaced - AUTUMN – Sustained & Cyclic Current Ratings. |
| Q1win | 132kV single core impregnated pressure gas cables Trefoil - WINTER – Sustained & Cyclic Current Ratings. |
| Q2 spr | 132kV single core impregnated pressure gas cables Trefoil - SPRING – Sustained & Cyclic Current Ratings. |
| Q3 sum | 132kV single core impregnated pressure gas cables Trefoil - SUMMER – Sustained & Cyclic Current Ratings. |
| Q4 aut | 132kV single core impregnated pressure gas cables Trefoil - AUTUMN – Sustained & Cyclic Current Ratings. |
| R1win | 132kV single core impregnated pressure gas cables Flat spaced - WINTER – Sustained & Cyclic Current Ratings. |
| R2 spr | 132kV single core impregnated pressure gas cables Flat spaced - SPRING – Sustained & Cyclic Current Ratings. |
| R3 sum | 132kV single core impregnated pressure gas cables Flat spaced - SUMMER – Sustained & Cyclic Current Ratings. |
| R4 aut | 132kV single core impregnated pressure gas cables Flat spaced - AUTUMN – Sustained & Cyclic Current Ratings. |
| S1win | 132kV EPR Cu. Wire MDPE oversheath Trefoil - WINTER – Sustained and Cyclic Current Ratings. |
| S2 spr | 132kV EPR Cu. Wire MDPE oversheath Trefoil - SPRING - Sustained and Cyclic Current Ratings. |
| S3 sum | 132kV EPR Cu. Wire MDPE oversheath Trefoil - SUMMER - Sustained and Cyclic Current Ratings. |
| S4 aut | 132kV EPR Cu. Wire MDPE oversheath Trefoil - AUTUMN - Sustained and Cyclic Current Ratings. |
| T1win | 132kV EPR Cu. Wire MDPE oversheath Flat spaced - WINTER – Sustained and Cyclic Current Ratings. |
| T2 spr | 132kV EPR Cu. Wire MDPE oversheath Flat spaced - SPRING - Sustained and Cyclic Current Ratings. |
| T3 sum | 132kV EPR Cu. Wire MDPE oversheath Flat spaced - SUMMER - Sustained and Cyclic Current Ratings. |
| T4 aut | 132kV EPR Cu. Wire MDPE oversheath Flat spaced - AUTUMN - Sustained and Cyclic Current Ratings. |

TABLE 1

GROUP DERATING FACTORS FOR CIRCUITS OF THREE SINGLE-CORE CABLES, IN TREFOIL or LAID FLAT, HORIZONTAL FORMATION, LAID DIRECT.

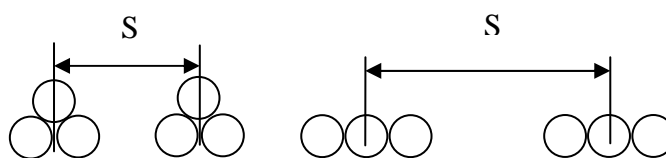

| Type of Cable | No. of Circuits | Spacing of Circuits – Metre (S). | | | |
|---------------------|-----------------|---|-----------|--|--|
| | | Touching | | | |
| | | Trefoil | Laid Flat | | |
| 132kV Cables | | Contact Company Cable Engineer in Avonbank for information. | | | |

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Winter SUSTAINED Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|------------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 514 | 474 | 458 | 588 |
| 240mm ² Copper | 594 | 540 | 520 | 688 |
| 300mm ² Copper | 666 | 599 | 575 | 782 |
| 400mm ² Copper | 753 | 667 | 638 | 899 |
| 500mm ² Copper | 850 | 740 | 705 | 1034 |
| 630mm ² Copper | 951 | 815 | 774 | 1180 |
| 800mm ² Copper | 1050 | 889 | 840 | 1332 |
| 1000mm ² Copper | 1141 | 961 | 904 | 1473 |
| 1000Smm ² Copper | 1190 | 1001 | 941 | 1557 |
| 1200Smm ² Copper | 1262 | 1056 | 989 | 1671 |
| 1600Smm ² Copper | 1332 | 1131 | 1058 | 1798 |
| 2000Smm ² Copper | 1414 | 1209 | 1127 | 1965 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 525 | 484 | 467 | 614 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 0.9°C m/W

Ground Ambient Temperature 10°C

Air Ambient Temperature 10°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for HV polymeric cables.

TABLE A1 - Win

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Winter CYCLIC Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 589 | 550 | 534 | 588 |
| 240mm ² Copper | 684 | 632 | 612 | 688 |
| 300mm ² Copper | 772 | 705 | 681 | 782 |
| 400mm ² Copper | 878 | 791 | 761 | 899 |
| 500mm ² Copper | 996 | 884 | 848 | 1034 |
| 630mm ² Copper | 1121 | 982 | 939 | 1180 |
| 800mm ² Copper | 1245 | 1079 | 1029 | 1332 |
| 1000mm ² Copper | 1360 | 1175 | 1119 | 1473 |
| 1000Smm ² Copper | 1424 | 1230 | 1169 | 1557 |
| 1200Smm ² Copper | 1516 | 1306 | 1240 | 1671 |
| 1600Smm ² Copper | 1613 | 1411 | 1339 | 1798 |
| 2000Smm ² Copper | 1727 | 1523 | 1442 | 1965 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 607 | 566 | 549 | 614 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 0.9°C m/W

Ground Ambient Temperature 10°C

Air Ambient Temperature 10°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for HV polymeric cables.

TABLE A2 - Spr

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 482 | 449 | 436 | 588 |
| 240mm ² Copper | 556 | 511 | 494 | 688 |
| 300mm ² Copper | 623 | 566 | 546 | 782 |
| 400mm ² Copper | 703 | 629 | 604 | 899 |
| 500mm ² Copper | 792 | 697 | 667 | 1034 |
| 630mm ² Copper | 885 | 767 | 731 | 1180 |
| 800mm ² Copper | 976 | 835 | 792 | 1332 |
| 1000mm ² Copper | 1058 | 901 | 852 | 1473 |
| 1000Smm ² Copper | 1104 | 938 | 886 | 1557 |
| 1200Smm ² Copper | 1169 | 989 | 931 | 1671 |
| 1600Smm ² Copper | 1233 | 1058 | 994 | 1798 |
| 2000Smm ² Copper | 1308 | 1129 | 1058 | 1965 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 492 | 458 | 444 | 614 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 559 | 527 | 514 | 588 |
| 240mm ² Copper | 648 | 605 | 588 | 688 |
| 300mm ² Copper | 730 | 674 | 653 | 782 |
| 400mm ² Copper | 828 | 755 | 728 | 899 |
| 500mm ² Copper | 937 | 842 | 810 | 1034 |
| 630mm ² Copper | 1053 | 933 | 895 | 1180 |
| 800mm ² Copper | 1168 | 1024 | 979 | 1332 |
| 1000mm ² Copper | 1274 | 1113 | 1063 | 1473 |
| 1000Smm ² Copper | 1333 | 1163 | 1110 | 1557 |
| 1200Smm ² Copper | 1418 | 1234 | 1176 | 1671 |
| 1600Smm ² Copper | 1508 | 1332 | 1268 | 1798 |
| 2000Smm ² Copper | 1610 | 1434 | 1362 | 1965 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 574 | 542 | 527 | 614 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 1.05°C m/W

Ground Ambient Temperature 12°C

Air Ambient Temperature 12°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for MV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 451 | 424 | 412 | 588 |
| 240mm ² Copper | 519 | 482 | 467 | 688 |
| 300mm ² Copper | 582 | 533 | 515 | 782 |
| 400mm ² Copper | 656 | 592 | 570 | 899 |
| 500mm ² Copper | 737 | 655 | 628 | 1034 |
| 630mm ² Copper | 823 | 719 | 687 | 1180 |
| 800mm ² Copper | 906 | 782 | 744 | 1332 |
| 1000mm ² Copper | 982 | 843 | 800 | 1473 |
| 1000Smm ² Copper | 1023 | 877 | 831 | 1557 |
| 1200Smm ² Copper | 1083 | 924 | 873 | 1671 |
| 1600Smm ² Copper | 1142 | 988 | 932 | 1798 |
| 2000Smm ² Copper | 1210 | 1053 | 991 | 1965 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 459 | 432 | 419 | 614 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 1.2 C m/W

Ground Ambient Temperature 15°C

Air Ambient Temperature 15°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 528 | 503 | 491 | 588 |
| 240mm ² Copper | 611 | 576 | 561 | 688 |
| 300mm ² Copper | 687 | 642 | 622 | 782 |
| 400mm ² Copper | 778 | 717 | 693 | 899 |
| 500mm ² Copper | 880 | 798 | 770 | 1034 |
| 630mm ² Copper | 987 | 883 | 849 | 1180 |
| 800mm ² Copper | 1093 | 967 | 928 | 1332 |
| 1000mm ² Copper | 1191 | 1050 | 1006 | 1473 |
| 1000Smm ² Copper | 1246 | 1097 | 1050 | 1557 |
| 1200Smm ² Copper | 1324 | 1162 | 1111 | 1671 |
| 1600Smm ² Copper | 1406 | 1253 | 1197 | 1798 |
| 2000Smm ² Copper | 1501 | 1346 | 1283 | 1965 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 542 | 516 | 503 | 614 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 1.2 °C m/W

Ground Ambient Temperature 15°C

Air Ambient Temperature 15°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Autumn SUSTAINED Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 475 | 444 | 430 | 588 |
| 240mm ² Copper | 547 | 504 | 488 | 688 |
| 300mm ² Copper | 613 | 558 | 539 | 782 |
| 400mm ² Copper | 691 | 620 | 596 | 899 |
| 500mm ² Copper | 778 | 687 | 658 | 1034 |
| 630mm ² Copper | 869 | 755 | 720 | 1180 |
| 800mm ² Copper | 957 | 822 | 780 | 1332 |
| 1000mm ² Copper | 1038 | 886 | 839 | 1473 |
| 1000Smm ² Copper | 1083 | 923 | 872 | 1557 |
| 1200Smm ² Copper | 1147 | 972 | 917 | 1671 |
| 1600Smm ² Copper | 1209 | 1040 | 979 | 1798 |
| 2000Smm ² Copper | 1282 | 1110 | 1042 | 1965 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 483 | 452 | 438 | 614 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 552 | 523 | 509 | 588 |
| 240mm ² Copper | 640 | 599 | 582 | 688 |
| 300mm ² Copper | 720 | 667 | 674 | 782 |
| 400mm ² Copper | 816 | 746 | 721 | 899 |
| 500mm ² Copper | 923 | 832 | 801 | 1034 |
| 630mm ² Copper | 1037 | 922 | 885 | 1180 |
| 800mm ² Copper | 1149 | 1011 | 968 | 1332 |
| 1000mm ² Copper | 1253 | 1098 | 1050 | 1473 |
| 1000Smm ² Copper | 1311 | 1148 | 1096 | 1557 |
| 1200Smm ² Copper | 1395 | 1217 | 1161 | 1671 |
| 1600Smm ² Copper | 1482 | 1313 | 1252 | 1798 |
| 2000Smm ² Copper | 1582 | 1413 | 1344 | 1965 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 567 | 596 | 522 | 614 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1 C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| Metric sizes | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 544 | 529 | 515 | 653 |
| 240mm ² Copper | 633 | 615 | 598 | 770 |
| 300mm ² Copper | 716 | 695 | 676 | 881 |
| 400mm ² Copper | 818 | 795 | 773 | 1026 |
| 500mm ² Copper | 937 | 911 | 884 | 1198 |
| 630mm ² Copper | 1068 | 1040 | 1008 | 1393 |
| 800mm ² Copper | 1206 | 1175 | 1138 | 1608 |
| 1000mm ² Copper | 1336 | 1302 | 1261 | 1810 |
| 1000Smm ² Copper | 1419 | 1376 | 1332 | 1925 |
| 1200Smm ² Copper | 1532 | 1486 | 1438 | 2097 |
| 1600Smm ² Copper | 1640 | 1582 | 1530 | 2274 |
| 2000Smm ² Copper | 1796 | 1724 | 1667 | 2554 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 557 | 540 | 525 | 685 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 0.9 °C m/W

Ground Ambient Temperature 12°C

Air Ambient Temperature 12°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for HV polymeric cables.

TABLE B1 - Win**132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED.** (Dry design)Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|-------------------------------------|-----------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 636 | 609 | 594 | 653 |
| 240mm ² Copper | 745 | 712 | 693 | 770 |
| 300mm ² Copper | 847 | 809 | 787 | 881 |
| 400mm ² Copper | 974 | 930 | 904 | 1026 |
| 500mm ² Copper | 1123 | 1071 | 1040 | 1198 |
| 630mm ² Copper | 1290 | 1230 | 1194 | 1393 |
| 800mm ² Copper | 1467 | 1400 | 1357 | 1608 |
| 1000mm ² Copper | 1633 | 1561 | 1512 | 1810 |
| 1000Smm ² Copper | 1736 | 1653 | 1600 | 1925 |
| 1200Smm ² Copper | 1880 | 1793 | 1735 | 2097 |
| 1600Smm ² Copper | 2022 | 1926 | 1865 | 2274 |
| 2000Smm ² Copper | 2233 | 2117 | 2051 | 2554 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 658 | 628 | 610 | 685 |

Note: - S = segmental conductor stranding.Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 0.9°C m/W

Ground Ambient Temperature 10°C

Air Ambient Temperature 10°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for HV polymeric cables.

TABLE B2 - Spr

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 511 | 505 | 493 | 653 |
| 240mm ² Copper | 594 | 586 | 572 | 770 |
| 300mm ² Copper | 671 | 662 | 646 | 881 |
| 400mm ² Copper | 766 | 756 | 737 | 1026 |
| 500mm ² Copper | 875 | 865 | 842 | 1198 |
| 630mm ² Copper | 996 | 986 | 959 | 1393 |
| 800mm ² Copper | 1123 | 1112 | 1082 | 1608 |
| 1000mm ² Copper | 1243 | 1231 | 1197 | 1810 |
| 1000Smm ² Copper | 1321 | 1301 | 1265 | 1925 |
| 1200Smm ² Copper | 1425 | 1404 | 1364 | 2097 |
| 1600Smm ² Copper | 1525 | 1492 | 1450 | 2274 |
| 2000Smm ² Copper | 1668 | 1624 | 1578 | 2554 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 522 | 514 | 502 | 685 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| Metric sizes | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 605 | 588 | 574 | 653 |
| 240mm ² Copper | 708 | 686 | 670 | 770 |
| 300mm ² Copper | 803 | 779 | 759 | 881 |
| 400mm ² Copper | 923 | 894 | 871 | 1026 |
| 500mm ² Copper | 1062 | 1028 | 1001 | 1198 |
| 630mm ² Copper | 1218 | 1179 | 1147 | 1393 |
| 800mm ² Copper | 1382 | 1340 | 1303 | 1608 |
| 1000mm ² Copper | 1536 | 1492 | 1450 | 1810 |
| 1000Smm ² Copper | 1633 | 1579 | 1534 | 1925 |
| 1200Smm ² Copper | 1767 | 1712 | 1662 | 2097 |
| 1600Smm ² Copper | 1901 | 1835 | 1784 | 2274 |
| 2000Smm ² Copper | 2095 | 2013 | 1958 | 2554 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 642 | 604 | 589 | 685 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|--|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables. | |

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 479 | 479 | 469 | 653 |
| 240mm ² Copper | 556 | 556 | 544 | 770 |
| 300mm ² Copper | 628 | 627 | 614 | 881 |
| 400mm ² Copper | 715 | 716 | 700 | 1026 |
| 500mm ² Copper | 816 | 818 | 799 | 1198 |
| 630mm ² Copper | 928 | 931 | 909 | 1393 |
| 800mm ² Copper | 1045 | 1049 | 1024 | 1608 |
| 1000mm ² Copper | 1156 | 1160 | 1132 | 1810 |
| 1000Smm ² Copper | 1228 | 1225 | 1195 | 1925 |
| 1200Smm ² Copper | 1325 | 1321 | 1289 | 2097 |
| 1600Smm ² Copper | 1417 | 1403 | 1369 | 2274 |
| 2000Smm ² Copper | 1549 | 1524 | 1487 | 2554 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 488 | 487 | 477 | 685 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2 C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 573 | 564 | 551 | 653 |
| 240mm ² Copper | 670 | 657 | 643 | 770 |
| 300mm ² Copper | 760 | 745 | 728 | 881 |
| 400mm ² Copper | 871 | 855 | 835 | 1026 |
| 500mm ² Copper | 1001 | 982 | 958 | 1198 |
| 630mm ² Copper | 1145 | 1124 | 1097 | 1393 |
| 800mm ² Copper | 1297 | 1276 | 1244 | 1608 |
| 1000mm ² Copper | 1441 | 1419 | 1383 | 1810 |
| 1000Smm ² Copper | 1532 | 1502 | 1462 | 1925 |
| 1200Smm ² Copper | 1657 | 1626 | 1583 | 2097 |
| 1600Smm ² Copper | 1782 | 1741 | 1698 | 2274 |
| 2000Smm ² Copper | 1962 | 1906 | 1861 | 2554 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 590 | 578 | 565 | 685 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|--|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2 °C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables. | |

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 503 | 499 | 488 | 653 |
| 240mm ² Copper | 585 | 579 | 566 | 770 |
| 300mm ² Copper | 660 | 654 | 639 | 881 |
| 400mm ² Copper | 753 | 747 | 729 | 1026 |
| 500mm ² Copper | 860 | 854 | 833 | 1198 |
| 630mm ² Copper | 979 | 973 | 948 | 1393 |
| 800mm ² Copper | 1103 | 1098 | 1069 | 1608 |
| 1000mm ² Copper | 1221 | 1214 | 1182 | 1810 |
| 1000Smm ² Copper | 1297 | 1283 | 1249 | 1925 |
| 1200Smm ² Copper | 1399 | 1384 | 1347 | 2097 |
| 1600Smm ² Copper | 1497 | 1471 | 1432 | 2274 |
| 2000Smm ² Copper | 1637 | 1600 | 1557 | 2554 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 514 | 508 | 496 | 685 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1 C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 598 | 583 | 570 | 653 |
| 240mm ² Copper | 699 | 681 | 665 | 770 |
| 300mm ² Copper | 794 | 772 | 754 | 881 |
| 400mm ² Copper | 911 | 886 | 865 | 1026 |
| 500mm ² Copper | 1048 | 1019 | 993 | 1198 |
| 630mm ² Copper | 1200 | 1168 | 1138 | 1393 |
| 800mm ² Copper | 1361 | 1326 | 1291 | 1608 |
| 1000mm ² Copper | 1513 | 1477 | 1436 | 1810 |
| 1000Smm ² Copper | 1609 | 1563 | 1519 | 1925 |
| 1200Smm ² Copper | 1741 | 1694 | 1646 | 2097 |
| 1600Smm ² Copper | 1872 | 1815 | 1766 | 2274 |
| 2000Smm ² Copper | 2062 | 1989 | 1937 | 2554 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 617 | 599 | 584 | 685 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 1.1 °C m/W

Ground Ambient Temperature 12°C

Air Ambient Temperature 12°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for HV polymeric cables.

**132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE
WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL.** (Dry design)

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|-------------------------------------|--------------------------------|-------------------|------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| PVC | | Rigiduct | | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 505 | 452 | 436 | 581 |
| 240mm ² Copper | 580 | 511 | 491 | 678 |
| 300mm ² Copper | 648 | 562 | 538 | 768 |
| 400mm ² Copper | 727 | 618 | 590 | 878 |
| 500mm ² Copper | 813 | 678 | 645 | 1004 |
| 630mm ² Copper | 902 | 737 | 698 | 1138 |
| 800mm ² Copper | 988 | 797 | 752 | 1277 |
| 1000mm ² Copper | 1067 | 856 | 804 | 1405 |
| 1000Smm ² Copper | 1100 | 890 | 835 | 1472 |
| 1200Smm ² Copper | 1164 | 938 | 877 | 1577 |
| 1600Smm ² Copper | 1232 | 1016 | 947 | 1704 |
| 2000Smm ² Copper | 1317 | 1101 | 1023 | 1870 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 516 | 462 | 445 | 607 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| PVC | | Rigiduct | | |
| Metric sizes | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 580 | 526 | 510 | 581 |
| 240mm ² Copper | 671 | 600 | 580 | 678 |
| 300mm ² Copper | 754 | 665 | 641 | 768 |
| 400mm ² Copper | 850 | 737 | 708 | 878 |
| 500mm ² Copper | 957 | 816 | 782 | 1004 |
| 630mm ² Copper | 1068 | 895 | 855 | 1138 |
| 800mm ² Copper | 1178 | 977 | 931 | 1277 |
| 1000mm ² Copper | 1279 | 1059 | 1006 | 1405 |
| 1000Smm ² Copper | 1325 | 1106 | 1050 | 1472 |
| 1200Smm ² Copper | 1407 | 1174 | 1113 | 1577 |
| 1600Smm ² Copper | 1502 | 1281 | 1212 | 1704 |
| 2000Smm ² Copper | 1616 | 1399 | 1319 | 1870 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 598 | 542 | 525 | 607 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 0.9°C m/W

Ground Ambient Temperature 10°C

Air Ambient Temperature 10°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 474 | 428 | 415 | 581 |
| 240mm ² Copper | 543 | 483 | 466 | 678 |
| 300mm ² Copper | 605 | 531 | 511 | 768 |
| 400mm ² Copper | 678 | 583 | 558 | 878 |
| 500mm ² Copper | 757 | 639 | 610 | 1004 |
| 630mm ² Copper | 838 | 693 | 659 | 1138 |
| 800mm ² Copper | 916 | 749 | 709 | 1277 |
| 1000mm ² Copper | 988 | 803 | 757 | 1405 |
| 1000Smm ² Copper | 1019 | 834 | 786 | 1472 |
| 1200Smm ² Copper | 1076 | 878 | 825 | 1577 |
| 1600Smm ² Copper | 1140 | 950 | 890 | 1704 |
| 2000Smm ² Copper | 1217 | 1028 | 960 | 1870 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 483 | 437 | 423 | 607 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 550 | 504 | 491 | 581 |
| 240mm ² Copper | 635 | 574 | 556 | 678 |
| 300mm ² Copper | 711 | 635 | 614 | 768 |
| 400mm ² Copper | 801 | 702 | 677 | 878 |
| 500mm ² Copper | 900 | 776 | 746 | 1004 |
| 630mm ² Copper | 1001 | 850 | 815 | 1138 |
| 800mm ² Copper | 1103 | 926 | 885 | 1277 |
| 1000mm ² Copper | 1196 | 1002 | 955 | 1405 |
| 1000Smm ² Copper | 1238 | 1046 | 997 | 1472 |
| 1200Smm ² Copper | 1314 | 1109 | 1055 | 1577 |
| 1600Smm ² Copper | 1400 | 1208 | 1146 | 1704 |
| 2000Smm ² Copper | 1506 | 1316 | 1246 | 1870 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 566 | 518 | 503 | 607 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|--|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables. | |

TABLE C3 - Sum

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 443 | 405 | 393 | 581 |
| 240mm ² Copper | 507 | 456 | 441 | 678 |
| 300mm ² Copper | 565 | 500 | 482 | 768 |
| 400mm ² Copper | 631 | 548 | 527 | 878 |
| 500mm ² Copper | 704 | 600 | 574 | 1004 |
| 630mm ² Copper | 778 | 650 | 620 | 1138 |
| 800mm ² Copper | 850 | 701 | 666 | 1277 |
| 1000mm ² Copper | 916 | 751 | 711 | 1405 |
| 1000Smm ² Copper | 943 | 780 | 737 | 1472 |
| 1200Smm ² Copper | 996 | 821 | 774 | 1577 |
| 1600Smm ² Copper | 1054 | 887 | 834 | 1704 |
| 2000Smm ² Copper | 1125 | 959 | 899 | 1870 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 451 | 412 | 400 | 607 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

TABLE C3 - Sum

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Dry design)

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 519 | 481 | 469 | 581 |
| 240mm ² Copper | 598 | 547 | 531 | 678 |
| 300mm ² Copper | 669 | 604 | 585 | 768 |
| 400mm ² Copper | 752 | 667 | 644 | 878 |
| 500mm ² Copper | 843 | 735 | 709 | 1004 |
| 630mm ² Copper | 937 | 804 | 773 | 1138 |
| 800mm ² Copper | 1030 | 874 | 838 | 1277 |
| 1000mm ² Copper | 1116 | 944 | 903 | 1405 |
| 1000Smm ² Copper | 1155 | 985 | 942 | 1472 |
| 1200Smm ² Copper | 1225 | 1043 | 995 | 1577 |
| 1600Smm ² Copper | 1305 | 1135 | 1081 | 1704 |
| 2000Smm ² Copper | 1402 | 1235 | 1173 | 1870 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 533 | 494 | 480 | 607 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|--|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables. | |

**132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE
WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL.** (Dry design)

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|-------------------------------------|--------------------------------|-------------------|-----|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| PVC | | Rigiduct | | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 466 | 423 | 410 | 581 |
| 240mm ² Copper | 534 | 477 | 460 | 678 |
| 300mm ² Copper | 595 | 524 | 504 | 768 |
| 400mm ² Copper | 666 | 575 | 551 | 878 |
| 500mm ² Copper | 743 | 629 | 601 | 1004 |
| 630mm ² Copper | 822 | 683 | 650 | 1138 |
| 800mm ² Copper | 899 | 737 | 698 | 1277 |
| 1000mm ² Copper | 969 | 790 | 746 | 1405 |
| 1000Smm ² Copper | 999 | 821 | 774 | 1472 |
| 1200Smm ² Copper | 1055 | 864 | 812 | 1577 |
| 1600Smm ² Copper | 1117 | 934 | 876 | 1704 |
| 2000Smm ² Copper | 1192 | 1010 | 945 | 1870 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 475 | 431 | 418 | 607 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

**132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE
WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL.** (Dry design)

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|-------------------------------------|-----------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 543 | 500 | 486 | 581 |
| 240mm ² Copper | 626 | 568 | 551 | 678 |
| 300mm ² Copper | 701 | 628 | 608 | 768 |
| 400mm ² Copper | 789 | 695 | 670 | 878 |
| 500mm ² Copper | 886 | 767 | 738 | 1004 |
| 630mm ² Copper | 986 | 840 | 806 | 1138 |
| 800mm ² Copper | 1085 | 914 | 875 | 1277 |
| 1000mm ² Copper | 1176 | 988 | 944 | 1405 |
| 1000Smm ² Copper | 1217 | 1031 | 984 | 1472 |
| 1200Smm ² Copper | 1291 | 1093 | 1041 | 1577 |
| 1600Smm ² Copper | 1376 | 1191 | 1131 | 1704 |
| 2000Smm ² Copper | 1479 | 1297 | 1229 | 1870 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 558 | 513 | 499 | 607 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|--|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables. | |

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN FLAT SPACED. (Dry design)

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|------------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 544 | 522 | 509 | 653 |
| 240mm ² Copper | 634 | 608 | 592 | 771 |
| 300mm ² Copper | 717 | 687 | 669 | 883 |
| 400mm ² Copper | 820 | 786 | 764 | 1027 |
| 500mm ² Copper | 940 | 900 | 874 | 1200 |
| 630mm ² Copper | 1073 | 1028 | 997 | 1398 |
| 800mm ² Copper | 1212 | 1162 | 1127 | 1615 |
| 1000mm ² Copper | 1343 | 1288 | 1248 | 1819 |
| 1000Smm ² Copper | 1426 | 1363 | 1320 | 1933 |
| 1200Smm ² Copper | 1541 | 1472 | 1425 | 2109 |
| 1600Smm ² Copper | 1647 | 1568 | 1518 | 2285 |
| 2000Smm ² Copper | 1801 | 1706 | 1651 | 2562 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 558 | 534 | 519 | 689 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 637 | 600 | 585 | 653 |
| 240mm ² Copper | 746 | 702 | 683 | 771 |
| 300mm ² Copper | 848 | 797 | 776 | 883 |
| 400mm ² Copper | 976 | 917 | 891 | 1027 |
| 500mm ² Copper | 1127 | 1055 | 1025 | 1200 |
| 630mm ² Copper | 1295 | 1213 | 1177 | 1398 |
| 800mm ² Copper | 1474 | 1380 | 1339 | 1615 |
| 1000mm ² Copper | 1642 | 1540 | 1491 | 1819 |
| 1000Smm ² Copper | 1744 | 1632 | 1580 | 1933 |
| 1200Smm ² Copper | 1891 | 1771 | 1713 | 2109 |
| 1600Smm ² Copper | 2031 | 1904 | 1844 | 2285 |
| 2000Smm ² Copper | 2238 | 2090 | 2025 | 2562 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 659 | 618 | 602 | 689 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables | |

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|------------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 512 | 499 | 488 | 653 |
| 240mm ² Copper | 595 | 580 | 566 | 771 |
| 300mm ² Copper | 673 | 655 | 639 | 883 |
| 400mm ² Copper | 768 | 748 | 730 | 1027 |
| 500mm ² Copper | 878 | 855 | 833 | 1200 |
| 630mm ² Copper | 1001 | 975 | 950 | 1398 |
| 800mm ² Copper | 1129 | 1102 | 1072 | 1615 |
| 1000mm ² Copper | 1250 | 1219 | 1186 | 1819 |
| 1000Smm ² Copper | 1327 | 1290 | 1254 | 1933 |
| 1200Smm ² Copper | 1434 | 1392 | 1353 | 2109 |
| 1600Smm ² Copper | 1532 | 1481 | 1440 | 2285 |
| 2000Smm ² Copper | 1672 | 1608 | 1564 | 2562 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 523 | 509 | 496 | 689 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 606 | 579 | 566 | 653 |
| 240mm ² Copper | 709 | 677 | 660 | 771 |
| 300mm ² Copper | 805 | 768 | 749 | 883 |
| 400mm ² Copper | 925 | 882 | 860 | 1027 |
| 500mm ² Copper | 1066 | 1014 | 988 | 1200 |
| 630mm ² Copper | 1223 | 1163 | 1132 | 1398 |
| 800mm ² Copper | 1389 | 1322 | 1286 | 1615 |
| 1000mm ² Copper | 1545 | 1474 | 1431 | 1819 |
| 1000Smm ² Copper | 1641 | 1561 | 1515 | 1933 |
| 1200Smm ² Copper | 1778 | 1692 | 1643 | 2109 |
| 1600Smm ² Copper | 1910 | 1816 | 1765 | 2285 |
| 2000Smm ² Copper | 2101 | 1989 | 1935 | 2562 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 625 | 596 | 581 | 689 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|---|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables | |

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Summer SUSTAINED Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|------------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 479 | 474 | 464 | 653 |
| 240mm ² Copper | 557 | 550 | 539 | 771 |
| 300mm ² Copper | 629 | 621 | 608 | 883 |
| 400mm ² Copper | 717 | 709 | 693 | 1027 |
| 500mm ² Copper | 819 | 809 | 791 | 1200 |
| 630mm ² Copper | 933 | 922 | 901 | 1398 |
| 800mm ² Copper | 1051 | 1040 | 1015 | 1615 |
| 1000mm ² Copper | 1162 | 1149 | 1122 | 1819 |
| 1000Smm ² Copper | 1234 | 1216 | 1186 | 1933 |
| 1200Smm ² Copper | 1333 | 1311 | 1279 | 2109 |
| 1600Smm ² Copper | 1423 | 1393 | 1360 | 2285 |
| 2000Smm ² Copper | 1553 | 1510 | 1475 | 2562 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 489 | 482 | 472 | 689 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables | |

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Summer CYCLIC Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 574 | 556 | 544 | 653 |
| 240mm ² Copper | 670 | 649 | 634 | 771 |
| 300mm ² Copper | 761 | 736 | 719 | 883 |
| 400mm ² Copper | 873 | 844 | 824 | 1027 |
| 500mm ² Copper | 1004 | 969 | 946 | 1200 |
| 630mm ² Copper | 1150 | 1110 | 1083 | 1398 |
| 800mm ² Copper | 1304 | 1260 | 1228 | 1615 |
| 1000mm ² Copper | 1449 | 1402 | 1366 | 1819 |
| 1000Smm ² Copper | 1540 | 1485 | 1446 | 1933 |
| 1200Smm ² Copper | 1668 | 1609 | 1566 | 2109 |
| 1600Smm ² Copper | 1790 | 1724 | 1681 | 2285 |
| 2000Smm ² Copper | 1967 | 1884 | 1839 | 2562 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 591 | 571 | 557 | 689 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables | |

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN FLAT SPACED. (Dry design)

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|------------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 504 | 494 | 483 | 653 |
| 240mm ² Copper | 585 | 573 | 560 | 771 |
| 300mm ² Copper | 662 | 648 | 633 | 883 |
| 400mm ² Copper | 755 | 739 | 722 | 1027 |
| 500mm ² Copper | 863 | 845 | 824 | 1200 |
| 630mm ² Copper | 983 | 963 | 939 | 1398 |
| 800mm ² Copper | 1109 | 1087 | 1059 | 1615 |
| 1000mm ² Copper | 1227 | 1203 | 1172 | 1819 |
| 1000Smm ² Copper | 1304 | 1272 | 1239 | 1933 |
| 1200Smm ² Copper | 1408 | 1373 | 1337 | 2109 |
| 1600Smm ² Copper | 1504 | 1460 | 1421 | 2285 |
| 2000Smm ² Copper | 1641 | 1584 | 1543 | 2562 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 514 | 503 | 491 | 689 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables

132kV SINGLE CORE X.L.P.E. INSULATED LEAD SHEATH & COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Dry design)

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 599 | 575 | 562 | 653 |
| 240mm ² Copper | 700 | 671 | 656 | 771 |
| 300mm ² Copper | 795 | 762 | 744 | 883 |
| 400mm ² Copper | 913 | 874 | 853 | 1027 |
| 500mm ² Copper | 1051 | 1005 | 980 | 1200 |
| 630mm ² Copper | 1206 | 1153 | 1123 | 1398 |
| 800mm ² Copper | 1368 | 1310 | 1275 | 1615 |
| 1000mm ² Copper | 1522 | 1459 | 1418 | 1819 |
| 1000Smm ² Copper | 1617 | 1545 | 1501 | 1933 |
| 1200Smm ² Copper | 1751 | 1675 | 1627 | 2109 |
| 1600Smm ² Copper | 1881 | 1796 | 1747 | 2285 |
| 2000Smm ² Copper | 2068 | 1966 | 1915 | 2562 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 618 | 591 | 577 | 689 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables | |

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 285 | 244 | 230 | 292 |
| 150mm ² Al | 321 | 274 | 258 | 331 |
| 185mm ² Al | 367 | 312 | 292 | 384 |
| 240mm ² Al | 423 | 358 | 335 | 447 |
| 260mm ² Al | 443 | 375 | 351 | 471 |
| 300mm ² Al | 481 | 406 | 379 | 518 |
| 350mm ² Al | 516 | 436 | 406 | 560 |
| 400mm ² Al | 548 | 462 | 429 | 600 |
| 500mm ² Al | 615 | 518 | 481 | 683 |
| 630mm ² Al | 702 | 588 | 544 | 796 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 367 | 314 | 296 | 375 |
| 150mm ² | 413 | 352 | 331 | 427 |
| 185mm ² | 471 | 399 | 375 | 493 |
| 240mm ² | 541 | 458 | 429 | 572 |
| 260mm ² | 564 | 478 | 446 | 601 |
| 300mm ² | 612 | 517 | 482 | 661 |
| 350mm ² | 654 | 552 | 514 | 710 |
| 400mm ² | 691 | 582 | 541 | 758 |
| 500mm ² | 768 | 646 | 600 | 855 |
| 630mm ² | 861 | 721 | 666 | 978 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 324 | 267 | 249 | 292 |
| 150mm ² Al | 366 | 300 | 279 | 331 |
| 185mm ² Al | 422 | 343 | 317 | 384 |
| 240mm ² Al | 487 | 395 | 365 | 447 |
| 260mm ² Al | 512 | 414 | 382 | 471 |
| 300mm ² Al | 559 | 450 | 414 | 518 |
| 350mm ² Al | 601 | 483 | 444 | 560 |
| 400mm ² Al | 640 | 513 | 470 | 600 |
| 500mm ² Al | 723 | 578 | 528 | 683 |
| 630mm ² Al | 833 | 660 | 599 | 796 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 416 | 343 | 320 | 375 |
| 150mm ² | 472 | 386 | 359 | 427 |
| 185mm ² | 541 | 440 | 407 | 493 |
| 240mm ² | 624 | 505 | 467 | 572 |
| 260mm ² | 652 | 527 | 486 | 601 |
| 300mm ² | 713 | 573 | 527 | 661 |
| 350mm ² | 762 | 612 | 562 | 710 |
| 400mm ² | 808 | 647 | 593 | 758 |
| 500mm ² | 903 | 721 | 658 | 855 |
| 630mm ² | 1023 | 809 | 734 | 978 |

Parameters

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |
| Ratings based on Crater for oil filled cables | |

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 268 | 234 | 221 | 292 |
| 150mm ² Al | 301 | 262 | 247 | 331 |
| 185mm ² Al | 343 | 297 | 280 | 384 |
| 240mm ² Al | 395 | 342 | 321 | 447 |
| 260mm ² Al | 414 | 358 | 336 | 471 |
| 300mm ² Al | 448 | 386 | 362 | 518 |
| 350mm ² Al | 481 | 414 | 388 | 560 |
| 400mm ² Al | 510 | 439 | 410 | 600 |
| 500mm ² Al | 573 | 492 | 459 | 683 |
| 630mm ² Al | 652 | 557 | 517 | 796 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 344 | 300 | 284 | 375 |
| 150mm ² | 387 | 337 | 318 | 427 |
| 185mm ² | 440 | 381 | 359 | 493 |
| 240mm ² | 505 | 437 | 410 | 572 |
| 260mm ² | 527 | 455 | 427 | 601 |
| 300mm ² | 571 | 492 | 461 | 661 |
| 350mm ² | 609 | 525 | 491 | 710 |
| 400mm ² | 643 | 553 | 517 | 758 |
| 500mm ² | 714 | 613 | 572 | 855 |
| 630mm ² | 799 | 682 | 634 | 978 |

Parameters

| | |
|---|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |
| Ratings based on Crater for oil filled cables | |

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 308 | 258 | 241 | 292 |
| 150mm ² Al | 348 | 290 | 270 | 331 |
| 185mm ² Al | 399 | 331 | 308 | 384 |
| 240mm ² Al | 461 | 381 | 353 | 447 |
| 260mm ² Al | 484 | 400 | 370 | 471 |
| 300mm ² Al | 528 | 433 | 400 | 518 |
| 350mm ² Al | 567 | 465 | 429 | 560 |
| 400mm ² Al | 604 | 494 | 454 | 600 |
| 500mm ² Al | 681 | 555 | 509 | 683 |
| 630mm ² Al | 783 | 633 | 577 | 796 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 396 | 332 | 310 | 375 |
| 150mm ² | 448 | 374 | 348 | 427 |
| 185mm ² | 512 | 425 | 394 | 493 |
| 240mm ² | 590 | 488 | 452 | 572 |
| 260mm ² | 617 | 509 | 471 | 601 |
| 300mm ² | 673 | 552 | 509 | 661 |
| 350mm ² | 719 | 590 | 543 | 710 |
| 400mm ² | 762 | 623 | 572 | 758 |
| 500mm ² | 850 | 693 | 635 | 855 |
| 630mm ² | 961 | 776 | 707 | 978 |

Parameters

| | |
|---|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |
| Ratings based on Crater for oil filled cables | |

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 251 | 222 | 211 | 292 |
| 150mm ² Al | 281 | 249 | 235 | 331 |
| 185mm ² Al | 320 | 282 | 266 | 384 |
| 240mm ² Al | 368 | 324 | 305 | 447 |
| 260mm ² Al | 385 | 339 | 319 | 471 |
| 300mm ² Al | 417 | 365 | 344 | 518 |
| 350mm ² Al | 447 | 392 | 368 | 560 |
| 400mm ² Al | 474 | 414 | 389 | 600 |
| 500mm ² Al | 531 | 464 | 434 | 683 |
| 630mm ² Al | 603 | 524 | 489 | 796 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 322 | 286 | 271 | 375 |
| 150mm ² | 362 | 320 | 303 | 427 |
| 185mm ² | 411 | 362 | 341 | 493 |
| 240mm ² | 471 | 414 | 390 | 572 |
| 260mm ² | 490 | 431 | 406 | 601 |
| 300mm ² | 531 | 465 | 437 | 661 |
| 350mm ² | 566 | 496 | 466 | 710 |
| 400mm ² | 597 | 522 | 490 | 758 |
| 500mm ² | 663 | 578 | 541 | 855 |
| 630mm ² | 739 | 642 | 599 | 978 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Summer CYCLIC Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 291 | 248 | 232 | 292 |
| 150mm ² Al | 328 | 279 | 260 | 331 |
| 185mm ² Al | 376 | 318 | 296 | 384 |
| 240mm ² Al | 434 | 365 | 339 | 447 |
| 260mm ² Al | 456 | 383 | 355 | 471 |
| 300mm ² Al | 496 | 415 | 384 | 518 |
| 350mm ² Al | 533 | 445 | 411 | 560 |
| 400mm ² Al | 566 | 472 | 435 | 600 |
| 500mm ² Al | 638 | 530 | 487 | 683 |
| 630mm ² Al | 732 | 603 | 551 | 796 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 374 | 319 | 299 | 375 |
| 150mm ² | 423 | 359 | 335 | 427 |
| 185mm ² | 483 | 407 | 379 | 493 |
| 240mm ² | 555 | 467 | 434 | 572 |
| 260mm ² | 580 | 487 | 452 | 601 |
| 300mm ² | 632 | 528 | 489 | 661 |
| 350mm ² | 675 | 564 | 521 | 710 |
| 400mm ² | 715 | 595 | 548 | 758 |
| 500mm ² | 797 | 661 | 608 | 855 |
| 630mm ² | 899 | 739 | 676 | 978 |

Parameters

| | |
|---|----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |
| Ratings based on Crater for oil filled cables | |

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.Autumn SUSTAINED Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 264 | 231 | 219 | 292 |
| 150mm ² Al | 296 | 259 | 245 | 331 |
| 185mm ² Al | 338 | 294 | 277 | 384 |
| 240mm ² Al | 389 | 338 | 318 | 447 |
| 260mm ² Al | 407 | 354 | 332 | 471 |
| 300mm ² Al | 441 | 382 | 358 | 518 |
| 350mm ² Al | 473 | 409 | 384 | 560 |
| 400mm ² Al | 501 | 433 | 406 | 600 |
| 500mm ² Al | 562 | 486 | 454 | 683 |
| 630mm ² Al | 640 | 550 | 512 | 796 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 339 | 297 | 282 | 375 |
| 150mm ² | 381 | 333 | 315 | 427 |
| 185mm ² | 433 | 377 | 355 | 493 |
| 240mm ² | 497 | 432 | 406 | 572 |
| 260mm ² | 518 | 450 | 423 | 601 |
| 300mm ² | 561 | 486 | 456 | 661 |
| 350mm ² | 599 | 518 | 486 | 710 |
| 400mm ² | 632 | 546 | 511 | 758 |
| 500mm ² | 702 | 606 | 566 | 855 |
| 630mm ² | 784 | 673 | 626 | 978 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 304 | 257 | 240 | 292 |
| 150mm ² Al | 344 | 288 | 269 | 331 |
| 185mm ² Al | 394 | 329 | 306 | 384 |
| 240mm ² Al | 455 | 379 | 351 | 447 |
| 260mm ² Al | 478 | 397 | 367 | 471 |
| 300mm ² Al | 520 | 430 | 397 | 518 |
| 350mm ² Al | 559 | 462 | 426 | 560 |
| 400mm ² Al | 595 | 490 | 451 | 600 |
| 500mm ² Al | 671 | 551 | 505 | 683 |
| 630mm ² Al | 771 | 627 | 573 | 796 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 391 | 330 | 309 | 375 |
| 150mm ² | 442 | 371 | 346 | 427 |
| 185mm ² | 506 | 422 | 392 | 493 |
| 240mm ² | 582 | 484 | 449 | 572 |
| 260mm ² | 609 | 505 | 468 | 601 |
| 300mm ² | 664 | 548 | 506 | 661 |
| 350mm ² | 709 | 585 | 539 | 710 |
| 400mm ² | 751 | 618 | 569 | 758 |
| 500mm ² | 838 | 687 | 630 | 855 |
| 630mm ² | 946 | 769 | 702 | 978 |

Parameters

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |
| Ratings based on Crater for oil filled cables | |

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 0.1in ² Al | 98 | 84 | 79 | 99 |
| 0.15in ² Al | 133 | 114 | 108 | 136 |
| 0.2in ² Al | 166 | 142 | 134 | 171 |
| 0.25in ² Al | 218 | 186 | 175 | 227 |
| 0.3in ² Al | 266 | 227 | 213 | 280 |
| 0.35in ² Al | 309 | 263 | 246 | 326 |
| 0.4in ² Al | 349 | 296 | 277 | 373 |
| 0.45in ² Al | 391 | 331 | 309 | 422 |
| 0.5in ² Al | 453 | 383 | 357 | 491 |
| 0.55in ² Al | 499 | 422 | 394 | 542 |
| 0.6in ² Al | 506 | 427 | 397 | 557 |
| <u>Copper conductors</u> | | | | |
| 0.1in ² | 268 | 231 | 218 | 271 |
| 0.15in ² | 330 | 283 | 267 | 337 |
| 0.2in ² | 385 | 329 | 310 | 396 |
| 0.25in ² | 437 | 373 | 350 | 455 |
| 0.3in ² | 487 | 415 | 389 | 512 |
| 0.35in ² | 531 | 451 | 423 | 562 |
| 0.4in ² | 570 | 483 | 452 | 609 |
| 0.45in ² | 606 | 513 | 478 | 655 |
| 0.5in ² | 635 | 537 | 501 | 690 |
| 0.55in ² | 659 | 558 | 520 | 717 |
| 0.6in ² | 702 | 592 | 550 | 774 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Imperial sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.1in ² Al | 110 | 91 | 86 | 99 |
| 0.15in ² Al | 151 | 125 | 116 | 136 |
| 0.2in ² Al | 188 | 155 | 144 | 171 |
| 0.25in ² Al | 249 | 204 | 190 | 227 |
| 0.3in ² Al | 305 | 250 | 231 | 280 |
| 0.35in ² Al | 355 | 289 | 267 | 326 |
| 0.4in ² Al | 404 | 327 | 302 | 373 |
| 0.45in ² Al | 454 | 367 | 337 | 422 |
| 0.5in ² Al | 526 | 425 | 390 | 491 |
| 0.55in ² Al | 579 | 468 | 430 | 542 |
| 0.6in ² Al | 592 | 476 | 435 | 557 |
| <u>Copper conductors</u> | | | | |
| 0.1in ² | 303 | 251 | 235 | 271 |
| 0.15in ² | 374 | 309 | 288 | 337 |
| 0.2in ² | 438 | 360 | 335 | 396 |
| 0.25in ² | 499 | 409 | 380 | 455 |
| 0.3in ² | 559 | 456 | 422 | 512 |
| 0.35in ² | 612 | 498 | 460 | 562 |
| 0.4in ² | 659 | 534 | 492 | 609 |
| 0.45in ² | 704 | 568 | 522 | 655 |
| 0.5in ² | 739 | 596 | 548 | 690 |
| 0.55in ² | 766 | 619 | 568 | 717 |
| 0.6in ² | 821 | 659 | 603 | 774 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 0.1in ² Al | 92 | 81 | 76 | 99 |
| 0.15in ² Al | 125 | 109 | 103 | 136 |
| 0.2in ² Al | 156 | 136 | 128 | 171 |
| 0.25in ² Al | 204 | 178 | 168 | 227 |
| 0.3in ² Al | 249 | 217 | 204 | 280 |
| 0.35in ² Al | 289 | 250 | 235 | 326 |
| 0.4in ² Al | 326 | 282 | 265 | 373 |
| 0.45in ² Al | 365 | 315 | 295 | 422 |
| 0.5in ² Al | 423 | 365 | 341 | 491 |
| 0.55in ² Al | 465 | 402 | 376 | 542 |
| 0.6in ² Al | 472 | 406 | 379 | 557 |
| <u>Copper conductors</u> | | | | |
| 0.1in ² | 253 | 221 | 210 | 271 |
| 0.15in ² | 310 | 271 | 256 | 337 |
| 0.2in ² | 361 | 315 | 297 | 396 |
| 0.25in ² | 409 | 356 | 335 | 455 |
| 0.3in ² | 456 | 396 | 372 | 512 |
| 0.35in ² | 497 | 430 | 404 | 562 |
| 0.4in ² | 532 | 460 | 432 | 609 |
| 0.45in ² | 565 | 488 | 457 | 655 |
| 0.5in ² | 593 | 511 | 479 | 690 |
| 0.55in ² | 615 | 530 | 496 | 717 |
| 0.6in ² | 653 | 562 | 525 | 774 |

Parameters

| | |
|---|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |
| Ratings based on Crater for oil filled cables | |

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Imperial sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.1in ² Al | 105 | 89 | 83 | 99 |
| 0.15in ² Al | 143 | 121 | 113 | 136 |
| 0.2in ² Al | 179 | 150 | 140 | 171 |
| 0.25in ² Al | 237 | 198 | 184 | 227 |
| 0.3in ² Al | 290 | 241 | 224 | 280 |
| 0.35in ² Al | 337 | 279 | 259 | 326 |
| 0.4in ² Al | 382 | 316 | 292 | 373 |
| 0.45in ² Al | 429 | 354 | 326 | 422 |
| 0.5in ² Al | 497 | 409 | 377 | 491 |
| 0.55in ² Al | 547 | 451 | 416 | 542 |
| 0.6in ² Al | 558 | 457 | 420 | 557 |
| <u>Copper conductors</u> | | | | |
| 0.1in ² | 288 | 244 | 228 | 271 |
| 0.15in ² | 356 | 300 | 280 | 337 |
| 0.2in ² | 416 | 349 | 325 | 396 |
| 0.25in ² | 474 | 396 | 368 | 455 |
| 0.3in ² | 530 | 441 | 409 | 512 |
| 0.35in ² | 579 | 480 | 445 | 562 |
| 0.4in ² | 623 | 515 | 476 | 609 |
| 0.45in ² | 665 | 547 | 505 | 655 |
| 0.5in ² | 698 | 574 | 529 | 690 |
| 0.55in ² | 724 | 596 | 549 | 717 |
| 0.6in ² | 774 | 634 | 582 | 774 |

Parameters

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.Summer SUSTAINED Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 0.1in ² Al | 86 | 77 | 73 | 99 |
| 0.15in ² Al | 117 | 104 | 99 | 136 |
| 0.2in ² Al | 145 | 129 | 122 | 171 |
| 0.25in ² Al | 191 | 169 | 160 | 227 |
| 0.3in ² Al | 233 | 205 | 194 | 280 |
| 0.35in ² Al | 269 | 237 | 224 | 326 |
| 0.4in ² Al | 304 | 267 | 252 | 373 |
| 0.45in ² Al | 340 | 298 | 280 | 422 |
| 0.5in ² Al | 393 | 345 | 324 | 491 |
| 0.55in ² Al | 433 | 380 | 357 | 542 |
| 0.6in ² Al | 438 | 383 | 359 | 557 |
| <u>Copper conductors</u> | | | | |
| 0.1in ² | 237 | 211 | 200 | 271 |
| 0.15in ² | 290 | 258 | 245 | 337 |
| 0.2in ² | 338 | 299 | 283 | 396 |
| 0.25in ² | 382 | 338 | 319 | 455 |
| 0.3in ² | 425 | 375 | 354 | 512 |
| 0.35in ² | 463 | 408 | 385 | 562 |
| 0.4in ² | 496 | 436 | 410 | 609 |
| 0.45in ² | 526 | 461 | 434 | 655 |
| 0.5in ² | 551 | 483 | 454 | 690 |
| 0.55in ² | 572 | 501 | 471 | 717 |
| 0.6in ² | 607 | 531 | 497 | 774 |

Parameters

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |
| Ratings based on Crater for oil filled cables | |

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| Imperial sizes | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 0.1in ² Al | 99 | 85 | 80 | 99 |
| 0.15in ² Al | 136 | 116 | 109 | 136 |
| 0.2in ² Al | 169 | 144 | 135 | 171 |
| 0.25in ² Al | 223 | 190 | 177 | 227 |
| 0.3in ² Al | 273 | 231 | 215 | 280 |
| 0.35in ² Al | 317 | 268 | 249 | 326 |
| 0.4in ² Al | 359 | 302 | 280 | 373 |
| 0.45in ² Al | 404 | 338 | 313 | 422 |
| 0.5in ² Al | 468 | 391 | 362 | 491 |
| 0.55in ² Al | 515 | 431 | 398 | 542 |
| 0.6in ² Al | 524 | 437 | 403 | 557 |
| <u>Copper conductors</u> | | | | |
| 0.1in ² | 273 | 235 | 220 | 271 |
| 0.15in ² | 337 | 288 | 270 | 337 |
| 0.2in ² | 393 | 335 | 313 | 396 |
| 0.25in ² | 447 | 380 | 354 | 455 |
| 0.3in ² | 500 | 423 | 393 | 512 |
| 0.35in ² | 546 | 460 | 427 | 562 |
| 0.4in ² | 587 | 493 | 457 | 609 |
| 0.45in ² | 625 | 524 | 484 | 655 |
| 0.5in ² | 656 | 549 | 507 | 690 |
| 0.55in ² | 681 | 570 | 526 | 717 |
| 0.6in ² | 727 | 605 | 557 | 774 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 0.1in ² Al | 91 | 80 | 76 | 99 |
| 0.15in ² Al | 123 | 108 | 102 | 136 |
| 0.2in ² Al | 153 | 134 | 127 | 171 |
| 0.25in ² Al | 201 | 176 | 166 | 227 |
| 0.3in ² Al | 245 | 214 | 202 | 280 |
| 0.35in ² Al | 284 | 248 | 233 | 326 |
| 0.4in ² Al | 321 | 279 | 262 | 373 |
| 0.45in ² Al | 359 | 312 | 292 | 422 |
| 0.5in ² Al | 415 | 360 | 338 | 491 |
| 0.55in ² Al | 457 | 397 | 372 | 542 |
| 0.6in ² Al | 463 | 401 | 375 | 557 |
| <u>Copper conductors</u> | | | | |
| 0.1in ² | 249 | 219 | 208 | 271 |
| 0.15in ² | 306 | 268 | 254 | 337 |
| 0.2in ² | 356 | 312 | 295 | 396 |
| 0.25in ² | 403 | 352 | 332 | 455 |
| 0.3in ² | 448 | 391 | 369 | 512 |
| 0.35in ² | 489 | 426 | 401 | 562 |
| 0.4in ² | 523 | 455 | 428 | 609 |
| 0.45in ² | 556 | 482 | 452 | 655 |
| 0.5in ² | 582 | 505 | 474 | 690 |
| 0.55in ² | 604 | 524 | 491 | 717 |
| 0.6in ² | 642 | 555 | 519 | 774 |

Parameters

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |
| Ratings based on Crater for oil filled cables | |

132kV THREE CORE OIL FILLED LEAD SHEATHED DUCTED.

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Imperial sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.1in ² Al | 104 | 88 | 83 | 99 |
| 0.15in ² Al | 142 | 120 | 112 | 136 |
| 0.2in ² Al | 177 | 149 | 139 | 171 |
| 0.25in ² Al | 234 | 196 | 183 | 227 |
| 0.3in ² Al | 286 | 240 | 223 | 280 |
| 0.35in ² Al | 332 | 277 | 257 | 326 |
| 0.4in ² Al | 377 | 313 | 290 | 373 |
| 0.45in ² Al | 424 | 351 | 324 | 422 |
| 0.5in ² Al | 491 | 406 | 375 | 491 |
| 0.55in ² Al | 540 | 448 | 413 | 542 |
| 0.6in ² Al | 551 | 454 | 417 | 557 |
| <u>Copper conductors</u> | | | | |
| 0.1in ² | 285 | 242 | 227 | 271 |
| 0.15in ² | 352 | 298 | 278 | 337 |
| 0.2in ² | 411 | 347 | 323 | 396 |
| 0.25in ² | 468 | 393 | 366 | 455 |
| 0.3in ² | 523 | 438 | 407 | 512 |
| 0.35in ² | 572 | 477 | 442 | 562 |
| 0.4in ² | 615 | 511 | 473 | 609 |
| 0.45in ² | 656 | 543 | 502 | 655 |
| 0.5in ² | 689 | 570 | 526 | 690 |
| 0.55in ² | 714 | 591 | 545 | 717 |
| 0.6in ² | 764 | 629 | 578 | 774 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED CAS SHEATHED DUCTED.Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 283 | 243 | 229 | 292 |
| 150mm ² Al | 322 | 275 | 258 | 337 |
| 185mm ² Al | 366 | 311 | 291 | 387 |
| 240mm ² Al | 419 | 356 | 333 | 449 |
| 260mm ² Al | 440 | 373 | 348 | 476 |
| 300mm ² Al | 474 | 401 | 373 | 518 |
| 350mm ² Al | 509 | 430 | 400 | 562 |
| 400mm ² Al | 538 | 453 | 421 | 598 |
| 500mm ² Al | 603 | 507 | 469 | 679 |
| 630mm ² Al | 678 | 568 | 524 | 761 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 363 | 311 | 293 | 374 |
| 150mm ² | 413 | 352 | 330 | 432 |
| 185mm ² | 466 | 396 | 370 | 495 |
| 240mm ² | 532 | 451 | 421 | 571 |
| 260mm ² | 555 | 470 | 438 | 602 |
| 300mm ² | 597 | 504 | 469 | 655 |
| 350mm ² | 637 | 537 | 499 | 706 |
| 400mm ² | 669 | 563 | 522 | 748 |
| 500mm ² | 739 | 620 | 574 | 838 |
| 630mm ² | 816 | 682 | 629 | 921 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED CAS SHEATHED DUCTED.

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 322 | 266 | 248 | 292 |
| 150mm ² Al | 369 | 302 | 280 | 337 |
| 185mm ² Al | 421 | 343 | 317 | 387 |
| 240mm ² Al | 486 | 394 | 363 | 449 |
| 260mm ² Al | 511 | 413 | 380 | 476 |
| 300mm ² Al | 553 | 445 | 408 | 518 |
| 350mm ² Al | 597 | 479 | 438 | 562 |
| 400mm ² Al | 632 | 506 | 462 | 598 |
| 500mm ² Al | 713 | 568 | 517 | 679 |
| 630mm ² Al | 810 | 640 | 579 | 761 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 412 | 341 | 317 | 374 |
| 150mm ² | 473 | 387 | 359 | 432 |
| 185mm ² | 538 | 437 | 403 | 495 |
| 240mm ² | 617 | 499 | 459 | 571 |
| 260mm ² | 646 | 521 | 479 | 602 |
| 300mm ² | 698 | 561 | 514 | 655 |
| 350mm ² | 748 | 599 | 547 | 706 |
| 400mm ² | 788 | 629 | 574 | 748 |
| 500mm ² | 877 | 696 | 633 | 838 |
| 630mm ² | 978 | 770 | 696 | 921 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED CAS SHEATHED DUCTED.

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 266 | 233 | 220 | 292 |
| 150mm ² Al | 302 | 263 | 247 | 337 |
| 185mm ² Al | 342 | 296 | 279 | 387 |
| 240mm ² Al | 392 | 339 | 318 | 449 |
| 260mm ² Al | 411 | 355 | 333 | 476 |
| 300mm ² Al | 442 | 381 | 356 | 518 |
| 350mm ² Al | 474 | 408 | 382 | 562 |
| 400mm ² Al | 501 | 430 | 401 | 598 |
| 500mm ² Al | 560 | 480 | 447 | 679 |
| 630mm ² Al | 629 | 537 | 498 | 761 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 341 | 298 | 281 | 374 |
| 150mm ² | 386 | 336 | 316 | 432 |
| 185mm ² | 435 | 377 | 354 | 495 |
| 240mm ² | 497 | 429 | 403 | 571 |
| 260mm ² | 518 | 447 | 419 | 602 |
| 300mm ² | 556 | 479 | 448 | 655 |
| 350mm ² | 593 | 510 | 476 | 706 |
| 400mm ² | 622 | 534 | 498 | 748 |
| 500mm ² | 687 | 588 | 547 | 838 |
| 630mm ² | 756 | 645 | 598 | 921 |

Parameters

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED CAS SHEATHED DUCTED.Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 306 | 258 | 240 | 292 |
| 150mm ² Al | 350 | 292 | 272 | 337 |
| 185mm ² Al | 399 | 331 | 307 | 387 |
| 240mm ² Al | 459 | 380 | 351 | 449 |
| 260mm ² Al | 483 | 398 | 367 | 476 |
| 300mm ² Al | 522 | 428 | 394 | 518 |
| 350mm ² Al | 563 | 461 | 423 | 562 |
| 400mm ² Al | 596 | 486 | 446 | 598 |
| 500mm ² Al | 671 | 545 | 498 | 679 |
| 630mm ² Al | 761 | 613 | 557 | 761 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 392 | 330 | 308 | 374 |
| 150mm ² | 449 | 374 | 347 | 432 |
| 185mm ² | 509 | 421 | 390 | 495 |
| 240mm ² | 583 | 481 | 444 | 571 |
| 260mm ² | 610 | 502 | 463 | 602 |
| 300mm ² | 659 | 540 | 496 | 655 |
| 350mm ² | 705 | 576 | 528 | 706 |
| 400mm ² | 742 | 605 | 554 | 748 |
| 500mm ² | 825 | 668 | 610 | 838 |
| 630mm ² | 917 | 737 | 669 | 921 |

Parameters

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED CAS SHEATHED DUCTED.

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 249 | 221 | 210 | 292 |
| 150mm ² Al | 282 | 249 | 236 | 337 |
| 185mm ² Al | 319 | 281 | 265 | 387 |
| 240mm ² Al | 365 | 321 | 302 | 449 |
| 260mm ² Al | 382 | 336 | 316 | 476 |
| 300mm ² Al | 411 | 360 | 338 | 518 |
| 350mm ² Al | 441 | 386 | 362 | 562 |
| 400mm ² Al | 465 | 406 | 380 | 598 |
| 500mm ² Al | 519 | 452 | 423 | 679 |
| 630mm ² Al | 582 | 505 | 470 | 761 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 319 | 283 | 268 | 374 |
| 150mm ² | 361 | 319 | 301 | 432 |
| 185mm ² | 406 | 357 | 337 | 495 |
| 240mm ² | 462 | 406 | 383 | 571 |
| 260mm ² | 482 | 423 | 397 | 602 |
| 300mm ² | 517 | 453 | 425 | 655 |
| 350mm ² | 551 | 481 | 451 | 706 |
| 400mm ² | 577 | 504 | 472 | 748 |
| 500mm ² | 636 | 553 | 517 | 838 |
| 630mm ² | 699 | 606 | 564 | 921 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED CAS SHEATHED DUCTED.

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 290 | 248 | 232 | 292 |
| 150mm ² Al | 331 | 280 | 261 | 337 |
| 185mm ² Al | 376 | 317 | 295 | 387 |
| 240mm ² Al | 432 | 364 | 337 | 449 |
| 260mm ² Al | 455 | 381 | 353 | 476 |
| 300mm ² Al | 490 | 410 | 378 | 518 |
| 350mm ² Al | 528 | 440 | 405 | 562 |
| 400mm ² Al | 559 | 464 | 427 | 598 |
| 500mm ² Al | 629 | 519 | 476 | 679 |
| 630mm ² Al | 711 | 583 | 532 | 761 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 371 | 317 | 296 | 374 |
| 150mm ² | 423 | 359 | 334 | 432 |
| 185mm ² | 479 | 404 | 375 | 495 |
| 240mm ² | 549 | 461 | 427 | 571 |
| 260mm ² | 574 | 480 | 444 | 602 |
| 300mm ² | 619 | 516 | 476 | 655 |
| 350mm ² | 661 | 550 | 506 | 706 |
| 400mm ² | 696 | 577 | 530 | 748 |
| 500mm ² | 772 | 637 | 583 | 838 |
| 630mm ² | 857 | 701 | 639 | 921 |

Parameters

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |
| Ratings based on Crater for oil filled cables | |

132kV THREE CORE OIL FILLED CAS SHEATHED DUCTED.

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 262 | 231 | 218 | 292 |
| 150mm ² Al | 297 | 260 | 245 | 337 |
| 185mm ² Al | 336 | 293 | 276 | 387 |
| 240mm ² Al | 385 | 335 | 315 | 449 |
| 260mm ² Al | 404 | 351 | 329 | 476 |
| 300mm ² Al | 434 | 376 | 353 | 518 |
| 350mm ² Al | 466 | 403 | 378 | 562 |
| 400mm ² Al | 492 | 425 | 397 | 598 |
| 500mm ² Al | 550 | 474 | 442 | 679 |
| 630mm ² Al | 617 | 530 | 492 | 761 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 336 | 295 | 279 | 374 |
| 150mm ² | 380 | 332 | 313 | 432 |
| 185mm ² | 428 | 373 | 351 | 495 |
| 240mm ² | 488 | 424 | 399 | 571 |
| 260mm ² | 509 | 442 | 414 | 602 |
| 300mm ² | 547 | 474 | 443 | 655 |
| 350mm ² | 582 | 504 | 471 | 706 |
| 400mm ² | 611 | 528 | 493 | 748 |
| 500mm ² | 674 | 580 | 541 | 838 |
| 630mm ² | 742 | 636 | 591 | 921 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV THREE CORE OIL FILLED CAS SHEATHED DUCTED.

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 303 | 256 | 239 | 292 |
| 150mm ² Al | 346 | 290 | 270 | 337 |
| 185mm ² Al | 394 | 329 | 305 | 387 |
| 240mm ² Al | 453 | 377 | 349 | 449 |
| 260mm ² Al | 477 | 395 | 365 | 476 |
| 300mm ² Al | 515 | 425 | 392 | 518 |
| 350mm ² Al | 555 | 457 | 420 | 562 |
| 400mm ² Al | 587 | 482 | 443 | 598 |
| 500mm ² Al | 661 | 540 | 494 | 679 |
| 630mm ² Al | 749 | 607 | 553 | 761 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 388 | 328 | 306 | 374 |
| 150mm ² | 443 | 371 | 345 | 432 |
| 185mm ² | 502 | 418 | 388 | 495 |
| 240mm ² | 575 | 478 | 442 | 571 |
| 260mm ² | 602 | 498 | 460 | 602 |
| 300mm ² | 650 | 535 | 493 | 655 |
| 350mm ² | 695 | 571 | 525 | 706 |
| 400mm ² | 732 | 599 | 550 | 748 |
| 500mm ² | 813 | 662 | 605 | 838 |
| 630mm ² | 903 | 730 | 664 | 921 |

Parameters

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Winter SUSTAINED Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|------------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 303 | 289 | 282 | 334 |
| 150mm ² Al | 338 | 322 | 313 | 378 |
| 185mm ² Al | 381 | 361 | 351 | 429 |
| 240mm ² Al | 441 | 415 | 402 | 504 |
| 260mm ² Al | 461 | 432 | 419 | 530 |
| 300mm ² Al | 497 | 464 | 449 | 576 |
| 350mm ² Al | 536 | 496 | 479 | 631 |
| 400mm ² Al | 568 | 523 | 504 | 672 |
| 500mm ² Al | 641 | 579 | 555 | 775 |
| 630mm ² Al | 724 | 643 | 615 | 891 |
| 800mm ² Al | 813 | 716 | 683 | 1021 |
| 1000mm ² Al | 891 | 763 | 722 | 1147 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 389 | 368 | 357 | 429 |
| 150mm ² | 435 | 409 | 397 | 486 |
| 185mm ² | 489 | 457 | 443 | 551 |
| 240mm ² | 564 | 521 | 503 | 645 |
| 260mm ² | 588 | 541 | 523 | 678 |
| 300mm ² | 635 | 579 | 558 | 736 |
| 350mm ² | 682 | 616 | 592 | 804 |
| 400mm ² | 720 | 645 | 619 | 855 |
| 500mm ² | 805 | 703 | 671 | 976 |
| 630mm ² | 898 | 770 | 732 | 1110 |
| 800mm ² | 994 | 846 | 801 | 1253 |
| 1000mm ² | 1063 | 876 | 824 | 1376 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/w |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|------------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 345 | 329 | 320 | 334 |
| 150mm ² Al | 386 | 368 | 357 | 378 |
| 185mm ² Al | 436 | 414 | 401 | 429 |
| 240mm ² Al | 507 | 478 | 462 | 504 |
| 260mm ² Al | 530 | 498 | 481 | 530 |
| 300mm ² Al | 574 | 536 | 517 | 576 |
| 350mm ² Al | 621 | 575 | 554 | 631 |
| 400mm ² Al | 659 | 607 | 584 | 672 |
| 500mm ² Al | 750 | 677 | 648 | 775 |
| 630mm ² Al | 850 | 756 | 722 | 891 |
| 800mm ² Al | 960 | 847 | 807 | 1021 |
| 1000mm ² Al | 1059 | 908 | 860 | 1147 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 443 | 419 | 407 | 429 |
| 150mm ² | 496 | 468 | 453 | 486 |
| 185mm ² | 560 | 524 | 507 | 551 |
| 240mm ² | 648 | 600 | 579 | 645 |
| 260mm ² | 678 | 625 | 603 | 678 |
| 300mm ² | 733 | 671 | 646 | 736 |
| 350mm ² | 791 | 716 | 687 | 804 |
| 400mm ² | 837 | 753 | 722 | 855 |
| 500mm ² | 943 | 825 | 787 | 976 |
| 630mm ² | 1056 | 909 | 864 | 1110 |
| 800mm ² | 1176 | 1007 | 953 | 1253 |
| 1000mm ² | 1264 | 1051 | 989 | 1376 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 286 | 278 | 271 | 334 |
| 150mm ² Al | 319 | 309 | 302 | 378 |
| 185mm ² Al | 359 | 347 | 337 | 429 |
| 240mm ² Al | 416 | 398 | 387 | 504 |
| 260mm ² Al | 434 | 414 | 402 | 530 |
| 300mm ² Al | 468 | 444 | 431 | 576 |
| 350mm ² Al | 504 | 474 | 459 | 631 |
| 400mm ² Al | 533 | 499 | 483 | 672 |
| 500mm ² Al | 601 | 552 | 531 | 775 |
| 630mm ² Al | 677 | 612 | 587 | 891 |
| 800mm ² Al | 760 | 680 | 651 | 1021 |
| 1000mm ² Al | 832 | 723 | 688 | 1147 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 368 | 354 | 344 | 429 |
| 150mm ² | 410 | 393 | 382 | 486 |
| 185mm ² | 461 | 438 | 426 | 551 |
| 240mm ² | 531 | 499 | 484 | 645 |
| 260mm ² | 554 | 518 | 502 | 678 |
| 300mm ² | 597 | 554 | 536 | 736 |
| 350mm ² | 641 | 588 | 567 | 804 |
| 400mm ² | 676 | 616 | 593 | 855 |
| 500mm ² | 754 | 669 | 641 | 976 |
| 630mm ² | 840 | 732 | 698 | 1110 |
| 800mm ² | 929 | 803 | 763 | 1253 |
| 1000mm ² | 992 | 830 | 784 | 1376 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/w |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 329 | 320 | 312 | 334 |
| 150mm ² Al | 368 | 358 | 348 | 378 |
| 185mm ² Al | 415 | 402 | 390 | 429 |
| 240mm ² Al | 482 | 463 | 449 | 504 |
| 260mm ² Al | 504 | 483 | 468 | 530 |
| 300mm ² Al | 545 | 519 | 502 | 576 |
| 350mm ² Al | 590 | 557 | 538 | 631 |
| 400mm ² Al | 625 | 587 | 567 | 672 |
| 500mm ² Al | 709 | 653 | 627 | 775 |
| 630mm ² Al | 803 | 728 | 697 | 891 |
| 800mm ² Al | 907 | 814 | 778 | 1021 |
| 1000mm ² Al | 997 | 871 | 828 | 1147 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 423 | 408 | 397 | 429 |
| 150mm ² | 473 | 455 | 441 | 486 |
| 185mm ² | 533 | 509 | 493 | 551 |
| 240mm ² | 617 | 582 | 563 | 645 |
| 260mm ² | 644 | 606 | 585 | 678 |
| 300mm ² | 696 | 649 | 627 | 736 |
| 350mm ² | 751 | 692 | 666 | 804 |
| 400mm ² | 793 | 727 | 699 | 855 |
| 500mm ² | 892 | 795 | 761 | 976 |
| 630mm ² | 998 | 875 | 834 | 1110 |
| 800mm ² | 1108 | 967 | 918 | 1253 |
| 1000mm ² | 1190 | 1007 | 951 | 1376 |

Parameters

Cables laid in trefoil formation & solidly bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 1.05°C m/W

Ground Ambient Temperature 12°C

Air Ambient Temperature 12°C

Maximum Conductor Temperature 85°C

Ratings based on Crater for oil filled cables.

TABLE H3 – sum

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 262 | 259 | 253 | 334 |
| 150mm ² Al | 292 | 288 | 281 | 378 |
| 185mm ² Al | 328 | 322 | 314 | 429 |
| 240mm ² Al | 380 | 369 | 359 | 504 |
| 260mm ² Al | 396 | 384 | 373 | 530 |
| 300mm ² Al | 427 | 411 | 400 | 576 |
| 350mm ² Al | 459 | 439 | 426 | 631 |
| 400mm ² Al | 485 | 461 | 447 | 672 |
| 500mm ² Al | 546 | 509 | 491 | 775 |
| 630mm ² Al | 615 | 563 | 542 | 891 |
| 800mm ² Al | 689 | 625 | 600 | 1021 |
| 1000mm ² Al | 753 | 663 | 632 | 1147 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 337 | 329 | 321 | 429 |
| 150mm ² | 375 | 365 | 356 | 486 |
| 185mm ² | 422 | 407 | 396 | 551 |
| 240mm ² | 485 | 462 | 449 | 645 |
| 260mm ² | 505 | 480 | 466 | 678 |
| 300mm ² | 544 | 513 | 497 | 736 |
| 350mm ² | 584 | 543 | 525 | 804 |
| 400mm ² | 615 | 569 | 549 | 855 |
| 500mm ² | 685 | 616 | 592 | 976 |
| 630mm ² | 762 | 673 | 644 | 1110 |
| 800mm ² | 842 | 737 | 703 | 1253 |
| 1000mm ² | 898 | 761 | 721 | 1376 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/w |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 304 | 301 | 294 | 334 |
| 150mm ² Al | 340 | 336 | 327 | 378 |
| 185mm ² Al | 383 | 377 | 367 | 429 |
| 240mm ² Al | 444 | 434 | 422 | 504 |
| 260mm ² Al | 464 | 452 | 439 | 530 |
| 300mm ² Al | 501 | 486 | 471 | 576 |
| 350mm ² Al | 542 | 520 | 504 | 631 |
| 400mm ² Al | 574 | 548 | 531 | 672 |
| 500mm ² Al | 650 | 608 | 586 | 775 |
| 630mm ² Al | 735 | 677 | 650 | 891 |
| 800mm ² Al | 828 | 756 | 725 | 1021 |
| 1000mm ² Al | 909 | 807 | 769 | 1147 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 391 | 384 | 374 | 429 |
| 150mm ² | 437 | 427 | 415 | 486 |
| 185mm ² | 491 | 478 | 464 | 551 |
| 240mm ² | 568 | 545 | 529 | 645 |
| 260mm ² | 593 | 567 | 549 | 678 |
| 300mm ² | 640 | 608 | 588 | 736 |
| 350mm ² | 689 | 646 | 624 | 804 |
| 400mm ² | 728 | 679 | 654 | 855 |
| 500mm ² | 817 | 741 | 710 | 976 |
| 630mm ² | 913 | 813 | 777 | 1110 |
| 800mm ² | 1012 | 897 | 854 | 1253 |
| 1000mm ² | 1084 | 931 | 882 | 1376 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 277 | 271 | 265 | 334 |
| 150mm ² Al | 309 | 301 | 294 | 378 |
| 185mm ² Al | 348 | 337 | 329 | 429 |
| 240mm ² Al | 402 | 387 | 377 | 504 |
| 260mm ² Al | 420 | 403 | 391 | 530 |
| 300mm ² Al | 452 | 432 | 419 | 576 |
| 350mm ² Al | 487 | 461 | 447 | 631 |
| 400mm ² Al | 515 | 485 | 470 | 672 |
| 500mm ² Al | 581 | 536 | 516 | 775 |
| 630mm ² Al | 654 | 594 | 571 | 891 |
| 800mm ² Al | 734 | 660 | 632 | 1021 |
| 1000mm ² Al | 803 | 701 | 667 | 1147 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 356 | 344 | 336 | 429 |
| 150mm ² | 397 | 382 | 372 | 486 |
| 185mm ² | 446 | 427 | 415 | 551 |
| 240mm ² | 514 | 485 | 471 | 645 |
| 260mm ² | 536 | 504 | 488 | 678 |
| 300mm ² | 577 | 539 | 521 | 736 |
| 350mm ² | 619 | 571 | 551 | 804 |
| 400mm ² | 653 | 599 | 577 | 855 |
| 500mm ² | 729 | 649 | 623 | 976 |
| 630mm ² | 811 | 710 | 678 | 1110 |
| 800mm ² | 869 | 778 | 741 | 1253 |
| 1000mm ² | 957 | 804 | 761 | 1376 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/w |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
TREFOIL FORMATION**

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 319 | 313 | 305 | 334 |
| 150mm ² Al | 357 | 350 | 340 | 378 |
| 185mm ² Al | 403 | 392 | 381 | 429 |
| 240mm ² Al | 468 | 452 | 439 | 504 |
| 260mm ² Al | 489 | 471 | 457 | 530 |
| 300mm ² Al | 529 | 507 | 491 | 576 |
| 350mm ² Al | 572 | 543 | 525 | 631 |
| 400mm ² Al | 606 | 573 | 553 | 672 |
| 500mm ² Al | 687 | 636 | 612 | 775 |
| 630mm ² Al | 778 | 709 | 680 | 891 |
| 800mm ² Al | 877 | 792 | 758 | 1021 |
| 1000mm ² Al | 964 | 848 | 806 | 1147 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 411 | 399 | 388 | 429 |
| 150mm ² | 459 | 444 | 432 | 486 |
| 185mm ² | 517 | 497 | 482 | 551 |
| 240mm ² | 598 | 568 | 550 | 645 |
| 260mm ² | 625 | 591 | 572 | 678 |
| 300mm ² | 675 | 634 | 612 | 736 |
| 350mm ² | 728 | 675 | 650 | 804 |
| 400mm ² | 769 | 709 | 682 | 855 |
| 500mm ² | 864 | 775 | 742 | 976 |
| 630mm ² | 966 | 852 | 813 | 1110 |
| 800mm ² | 1072 | 941 | 894 | 1253 |
| 1000mm ² | 1150 | 979 | 925 | 1376 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 453 | 419 | 406 | 507 |
| 0.3in ² | 502 | 462 | 447 | 569 |
| 0.35in ² | 544 | 497 | 479 | 625 |
| 0.4in ² | 584 | 528 | 508 | 673 |
| 0.45in ² | 616 | 553 | 532 | 715 |
| 0.5in ² | 651 | 579 | 556 | 765 |
| 0.55in ² | 686 | 609 | 584 | 806 |
| 0.6in ² | 715 | 629 | 602 | 848 |
| 0.65in ² | 739 | 644 | 616 | 881 |
| 0.75in ² | 787 | 677 | 645 | 953 |
| 0.85in ² | 833 | 714 | 679 | 1010 |
| 1.0in ² | 915 | 774 | 734 | 1136 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
TREFOIL FORMATION**

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 517 | 480 | 464 | 507 |
| 0.3in ² | 574 | 532 | 514 | 569 |
| 0.35in ² | 625 | 573 | 553 | 625 |
| 0.4in ² | 671 | 611 | 588 | 673 |
| 0.45in ² | 710 | 641 | 617 | 715 |
| 0.5in ² | 753 | 673 | 646 | 765 |
| 0.55in ² | 794 | 710 | 681 | 806 |
| 0.6in ² | 829 | 735 | 704 | 848 |
| 0.65in ² | 859 | 754 | 721 | 881 |
| 0.75in ² | 919 | 795 | 759 | 953 |
| 0.85in ² | 973 | 842 | 803 | 1010 |
| 1.0in ² | 1076 | 918 | 872 | 1136 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 428 | 402 | 390 | 507 |
| 0.3in ² | 474 | 443 | 430 | 569 |
| 0.35in ² | 513 | 476 | 460 | 625 |
| 0.4in ² | 550 | 505 | 488 | 673 |
| 0.45in ² | 580 | 529 | 510 | 715 |
| 0.5in ² | 612 | 553 | 532 | 765 |
| 0.55in ² | 646 | 582 | 560 | 806 |
| 0.6in ² | 672 | 601 | 577 | 848 |
| 0.65in ² | 694 | 615 | 589 | 881 |
| 0.75in ² | 739 | 645 | 616 | 953 |
| 0.85in ² | 783 | 680 | 649 | 1010 |
| 1.0in ² | 858 | 736 | 700 | 1136 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 493 | 466 | 452 | 507 |
| 0.3in ² | 547 | 516 | 500 | 569 |
| 0.35in ² | 595 | 555 | 537 | 625 |
| 0.4in ² | 639 | 592 | 571 | 673 |
| 0.45in ² | 675 | 621 | 599 | 715 |
| 0.5in ² | 715 | 651 | 626 | 765 |
| 0.55in ² | 755 | 686 | 661 | 806 |
| 0.6in ² | 788 | 710 | 682 | 848 |
| 0.65in ² | 815 | 728 | 698 | 881 |
| 0.75in ² | 871 | 767 | 734 | 953 |
| 0.85in ² | 923 | 811 | 776 | 1010 |
| 1.0in ² | 1018 | 883 | 841 | 1136 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 392 | 373 | 363 | 507 |
| 0.3in ² | 433 | 411 | 399 | 569 |
| 0.35in ² | 469 | 441 | 427 | 625 |
| 0.4in ² | 503 | 468 | 453 | 673 |
| 0.45in ² | 530 | 490 | 474 | 715 |
| 0.5in ² | 558 | 511 | 493 | 765 |
| 0.55in ² | 589 | 538 | 519 | 806 |
| 0.6in ² | 612 | 555 | 534 | 848 |
| 0.65in ² | 632 | 567 | 545 | 881 |
| 0.75in ² | 672 | 594 | 570 | 953 |
| 0.85in ² | 713 | 627 | 600 | 1010 |
| 1.0in ² | 779 | 677 | 646 | 1136 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 415 | 391 | 380 | 507 |
| 0.3in ² | 459 | 431 | 418 | 569 |
| 0.35in ² | 497 | 463 | 448 | 625 |
| 0.4in ² | 533 | 491 | 475 | 673 |
| 0.45in ² | 561 | 514 | 497 | 715 |
| 0.5in ² | 592 | 537 | 518 | 765 |
| 0.55in ² | 625 | 566 | 545 | 806 |
| 0.6in ² | 650 | 583 | 561 | 848 |
| 0.65in ² | 671 | 597 | 573 | 881 |
| 0.75in ² | 714 | 626 | 599 | 953 |
| 0.85in ² | 757 | 660 | 631 | 1010 |
| 1.0in ² | 828 | 714 | 680 | 1136 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
TREFOIL FORMATION**

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 479 | 456 | 442 | 507 |
| 0.3in ² | 532 | 504 | 488 | 569 |
| 0.35in ² | 578 | 542 | 524 | 625 |
| 0.4in ² | 621 | 577 | 558 | 673 |
| 0.45in ² | 655 | 606 | 585 | 715 |
| 0.5in ² | 694 | 635 | 611 | 765 |
| 0.55in ² | 733 | 670 | 645 | 806 |
| 0.6in ² | 764 | 692 | 666 | 848 |
| 0.65in ² | 790 | 710 | 681 | 881 |
| 0.75in ² | 844 | 747 | 715 | 953 |
| 0.85in ² | 895 | 791 | 757 | 1010 |
| 1.0in ² | 985 | 860 | 819 | 1136 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 318 | 309 | 301 | 375 |
| 150mm ² Al | 356 | 346 | 337 | 423 |
| 185mm ² Al | 402 | 390 | 380 | 481 |
| 240mm ² Al | 467 | 454 | 441 | 568 |
| 260mm ² Al | 489 | 475 | 461 | 598 |
| 300mm ² Al | 529 | 514 | 499 | 652 |
| 350mm ² Al | 573 | 556 | 540 | 717 |
| 400mm ² Al | 608 | 591 | 573 | 766 |
| 500mm ² Al | 694 | 674 | 653 | 894 |
| 630mm ² Al | 792 | 770 | 745 | 1035 |
| 800mm ² Al | 901 | 876 | 847 | 1199 |
| 1000mm ² Al | 1012 | 985 | 952 | 1371 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 410 | 399 | 389 | 483 |
| 150mm ² | 459 | 446 | 434 | 545 |
| 185mm ² | 518 | 503 | 490 | 620 |
| 240mm ² | 600 | 584 | 568 | 730 |
| 260mm ² | 628 | 611 | 593 | 769 |
| 300mm ² | 680 | 661 | 642 | 838 |
| 350mm ² | 736 | 716 | 695 | 921 |
| 400mm ² | 780 | 759 | 736 | 983 |
| 500mm ² | 886 | 863 | 837 | 1143 |
| 630mm ² | 1007 | 982 | 951 | 1316 |
| 800mm ² | 1134 | 1110 | 1074 | 1512 |
| 1000mm ² | 1256 | 1232 | 1190 | 1703 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/w |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 370 | 350 | 340 | 375 |
| 150mm ² Al | 415 | 393 | 382 | 423 |
| 185mm ² Al | 470 | 445 | 432 | 481 |
| 240mm ² Al | 550 | 520 | 504 | 568 |
| 260mm ² Al | 576 | 545 | 528 | 598 |
| 300mm ² Al | 625 | 591 | 572 | 652 |
| 350mm ² Al | 681 | 643 | 621 | 717 |
| 400mm ² Al | 724 | 684 | 660 | 766 |
| 500mm ² Al | 833 | 784 | 756 | 894 |
| 630mm ² Al | 955 | 900 | 867 | 1035 |
| 800mm ² Al | 1092 | 1029 | 991 | 1199 |
| 1000mm ² Al | 1234 | 1165 | 1121 | 1371 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 477 | 451 | 439 | 483 |
| 150mm ² | 536 | 507 | 494 | 545 |
| 185mm ² | 606 | 574 | 558 | 620 |
| 240mm ² | 707 | 670 | 649 | 730 |
| 260mm ² | 741 | 702 | 680 | 769 |
| 300mm ² | 804 | 762 | 737 | 838 |
| 350mm ² | 875 | 828 | 800 | 921 |
| 400mm ² | 929 | 880 | 850 | 983 |
| 500mm ² | 1064 | 1007 | 971 | 1143 |
| 630mm ² | 1214 | 1151 | 1110 | 1316 |
| 800mm ² | 1377 | 1308 | 1261 | 1512 |
| 1000mm ² | 1532 | 1461 | 1490 | 1703 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 301 | 299 | 292 | 375 |
| 150mm ² Al | 337 | 334 | 326 | 423 |
| 185mm ² Al | 380 | 377 | 368 | 481 |
| 240mm ² Al | 441 | 438 | 427 | 568 |
| 260mm ² Al | 461 | 457 | 446 | 598 |
| 300mm ² Al | 499 | 494 | 482 | 652 |
| 350mm ² Al | 540 | 535 | 521 | 717 |
| 400mm ² Al | 573 | 568 | 552 | 766 |
| 500mm ² Al | 652 | 647 | 629 | 894 |
| 630mm ² Al | 744 | 738 | 717 | 1035 |
| 800mm ² Al | 845 | 838 | 814 | 1199 |
| 1000mm ² Al | 948 | 942 | 913 | 1371 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 388 | 385 | 376 | 483 |
| 150mm ² | 434 | 431 | 421 | 545 |
| 185mm ² | 489 | 486 | 474 | 620 |
| 240mm ² | 567 | 563 | 549 | 730 |
| 260mm ² | 592 | 588 | 573 | 769 |
| 300mm ² | 641 | 636 | 620 | 838 |
| 350mm ² | 693 | 688 | 670 | 921 |
| 400mm ² | 735 | 730 | 710 | 983 |
| 500mm ² | 833 | 828 | 805 | 1143 |
| 630mm ² | 945 | 941 | 915 | 1316 |
| 800mm ² | 1064 | 1062 | 1031 | 1512 |
| 1000mm ² | 1176 | 1177 | 1142 | 1703 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/w |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 355 | 342 | 333 | 375 |
| 150mm ² Al | 398 | 384 | 374 | 423 |
| 185mm ² Al | 450 | 434 | 423 | 481 |
| 240mm ² Al | 525 | 507 | 492 | 568 |
| 260mm ² Al | 550 | 531 | 515 | 598 |
| 300mm ² Al | 597 | 575 | 558 | 652 |
| 350mm ² Al | 649 | 625 | 606 | 717 |
| 400mm ² Al | 690 | 665 | 644 | 766 |
| 500mm ² Al | 792 | 762 | 736 | 894 |
| 630mm ² Al | 907 | 872 | 843 | 1035 |
| 800mm ² Al | 1036 | 996 | 962 | 1199 |
| 1000mm ² Al | 1169 | 1126 | 1087 | 1371 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 457 | 441 | 430 | 483 |
| 150mm ² | 513 | 496 | 483 | 545 |
| 185mm ² | 580 | 561 | 545 | 620 |
| 240mm ² | 675 | 653 | 634 | 730 |
| 260mm ² | 708 | 684 | 664 | 769 |
| 300mm ² | 767 | 742 | 719 | 838 |
| 350mm ² | 834 | 806 | 781 | 921 |
| 400mm ² | 886 | 856 | 829 | 983 |
| 500mm ² | 1012 | 977 | 945 | 1143 |
| 630mm ² | 1153 | 1116 | 1079 | 1316 |
| 800mm ² | 1306 | 1266 | 1224 | 1512 |
| 1000mm ² | 1451 | 1412 | 1366 | 1703 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 1.05°C m/W

Ground Ambient Temperature 12°C

Air Ambient Temperature 12°C

Maximum Conductor Temperature 85°C

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 277 | 280 | 274 | 375 |
| 150mm ² Al | 309 | 312 | 305 | 423 |
| 185mm ² Al | 348 | 352 | 344 | 481 |
| 240mm ² Al | 404 | 408 | 399 | 568 |
| 260mm ² Al | 422 | 426 | 416 | 598 |
| 300mm ² Al | 456 | 460 | 450 | 652 |
| 350mm ² Al | 493 | 498 | 486 | 717 |
| 400mm ² Al | 523 | 528 | 515 | 766 |
| 500mm ² Al | 594 | 600 | 585 | 894 |
| 630mm ² Al | 677 | 684 | 666 | 1035 |
| 800mm ² Al | 768 | 776 | 755 | 1199 |
| 1000mm ² Al | 862 | 870 | 847 | 1371 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 356 | 360 | 353 | 483 |
| 150mm ² | 398 | 403 | 394 | 545 |
| 185mm ² | 449 | 453 | 444 | 620 |
| 240mm ² | 519 | 525 | 513 | 730 |
| 260mm ² | 542 | 548 | 535 | 769 |
| 300mm ² | 586 | 593 | 579 | 838 |
| 350mm ² | 633 | 640 | 625 | 921 |
| 400mm ² | 671 | 678 | 662 | 983 |
| 500mm ² | 759 | 769 | 749 | 1143 |
| 630mm ² | 861 | 872 | 850 | 1316 |
| 800mm ² | 967 | 983 | 957 | 1512 |
| 1000mm ² | 1069 | 1087 | 1058 | 1703 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/w |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 329 | 323 | 315 | 375 |
| 150mm ² Al | 369 | 362 | 354 | 423 |
| 185mm ² Al | 417 | 409 | 399 | 481 |
| 240mm ² Al | 486 | 478 | 465 | 568 |
| 260mm ² Al | 509 | 500 | 486 | 598 |
| 300mm ² Al | 551 | 542 | 526 | 652 |
| 350mm ² Al | 599 | 588 | 570 | 717 |
| 400mm ² Al | 636 | 625 | 606 | 766 |
| 500mm ² Al | 729 | 714 | 692 | 894 |
| 630mm ² Al | 834 | 817 | 791 | 1035 |
| 800mm ² Al | 951 | 932 | 902 | 1199 |
| 1000mm ² Al | 1072 | 1051 | 1018 | 1371 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 424 | 417 | 407 | 483 |
| 150mm ² | 476 | 468 | 456 | 545 |
| 185mm ² | 537 | 529 | 515 | 620 |
| 240mm ² | 625 | 615 | 598 | 730 |
| 260mm ² | 654 | 644 | 626 | 769 |
| 300mm ² | 709 | 698 | 678 | 838 |
| 350mm ² | 770 | 757 | 735 | 921 |
| 400mm ² | 817 | 804 | 780 | 983 |
| 500mm ² | 932 | 916 | 888 | 1143 |
| 630mm ² | 1061 | 1045 | 1013 | 1316 |
| 800mm ² | 1198 | 1183 | 1147 | 1512 |
| 1000mm ² | 1330 | 1318 | 1278 | 1703 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 292 | 292 | 285 | 375 |
| 150mm ² Al | 326 | 326 | 318 | 423 |
| 185mm ² Al | 368 | 367 | 359 | 481 |
| 240mm ² Al | 427 | 427 | 416 | 568 |
| 260mm ² Al | 446 | 446 | 435 | 598 |
| 300mm ² Al | 483 | 482 | 470 | 652 |
| 350mm ² Al | 522 | 521 | 508 | 717 |
| 400mm ² Al | 554 | 553 | 538 | 766 |
| 500mm ² Al | 631 | 629 | 613 | 894 |
| 630mm ² Al | 719 | 717 | 698 | 1035 |
| 800mm ² Al | 816 | 815 | 792 | 1199 |
| 1000mm ² Al | 916 | 915 | 889 | 1371 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 376 | 376 | 368 | 483 |
| 150mm ² | 421 | 420 | 411 | 545 |
| 185mm ² | 474 | 474 | 463 | 620 |
| 240mm ² | 549 | 549 | 535 | 730 |
| 260mm ² | 574 | 573 | 559 | 769 |
| 300mm ² | 621 | 620 | 605 | 838 |
| 350mm ² | 671 | 671 | 653 | 921 |
| 400mm ² | 711 | 710 | 692 | 983 |
| 500mm ² | 805 | 806 | 785 | 1143 |
| 630mm ² | 914 | 916 | 891 | 1316 |
| 800mm ² | 1028 | 1032 | 1004 | 1512 |
| 1000mm ² | 1136 | 1143 | 1111 | 1703 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/w |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 345 | 335 | 327 | 375 |
| 150mm ² Al | 387 | 376 | 366 | 423 |
| 185mm ² Al | 438 | 425 | 414 | 481 |
| 240mm ² Al | 511 | 496 | 482 | 568 |
| 260mm ² Al | 535 | 519 | 504 | 598 |
| 300mm ² Al | 580 | 563 | 546 | 652 |
| 350mm ² Al | 630 | 611 | 592 | 717 |
| 400mm ² Al | 670 | 650 | 629 | 766 |
| 500mm ² Al | 768 | 744 | 719 | 894 |
| 630mm ² Al | 880 | 852 | 824 | 1035 |
| 800mm ² Al | 1004 | 972 | 940 | 1199 |
| 1000mm ² Al | 1133 | 1098 | 1061 | 1371 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 445 | 432 | 422 | 483 |
| 150mm ² | 499 | 485 | 473 | 545 |
| 185mm ² | 564 | 549 | 534 | 620 |
| 240mm ² | 656 | 639 | 621 | 730 |
| 260mm ² | 688 | 669 | 649 | 769 |
| 300mm ² | 746 | 726 | 704 | 838 |
| 350mm ² | 810 | 788 | 763 | 921 |
| 400mm ² | 860 | 836 | 811 | 983 |
| 500mm ² | 982 | 954 | 924 | 1143 |
| 630mm ² | 1119 | 1089 | 1054 | 1316 |
| 800mm ² | 1266 | 1235 | 1196 | 1512 |
| 1000mm ² | 1406 | 1377 | 1333 | 1703 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 480 | 467 | 455 | 569 |
| 0.3in ² | 534 | 519 | 505 | 635 |
| 0.35in ² | 582 | 565 | 550 | 701 |
| 0.4in ² | 626 | 609 | 592 | 757 |
| 0.45in ² | 663 | 645 | 626 | 807 |
| 0.5in ² | 704 | 685 | 665 | 870 |
| 0.55in ² | 744 | 723 | 703 | 914 |
| 0.6in ² | 779 | 758 | 735 | 969 |
| 0.65in ² | 809 | 787 | 764 | 1012 |
| 0.75in ² | 872 | 849 | 823 | 1103 |
| 0.85in ² | 928 | 903 | 876 | 1167 |
| 1.0in ² | 1037 | 1011 | 979 | 1336 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 560 | 531 | 517 | 569 |
| 0.3in ² | 623 | 593 | 576 | 635 |
| 0.35in ² | 682 | 649 | 629 | 701 |
| 0.4in ² | 735 | 700 | 678 | 757 |
| 0.45in ² | 780 | 742 | 719 | 807 |
| 0.5in ² | 833 | 791 | 766 | 870 |
| 0.55in ² | 879 | 836 | 810 | 914 |
| 0.6in ² | 924 | 878 | 850 | 969 |
| 0.65in ² | 961 | 913 | 884 | 1012 |
| 0.75in ² | 1040 | 988 | 956 | 1103 |
| 0.85in ² | 1106 | 1054 | 1021 | 1167 |
| 1.0in ² | 1245 | 1186 | 1147 | 1336 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 455 | 451 | 440 | 569 |
| 0.3in ² | 505 | 500 | 488 | 635 |
| 0.35in ² | 550 | 545 | 532 | 701 |
| 0.4in ² | 592 | 587 | 572 | 757 |
| 0.45in ² | 627 | 621 | 605 | 807 |
| 0.5in ² | 665 | 659 | 642 | 870 |
| 0.55in ² | 703 | 696 | 678 | 914 |
| 0.6in ² | 735 | 729 | 709 | 969 |
| 0.65in ² | 763 | 757 | 737 | 1012 |
| 0.75in ² | 822 | 815 | 793 | 1103 |
| 0.85in ² | 875 | 868 | 845 | 1167 |
| 1.0in ² | 976 | 969 | 942 | 1336 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 537 | 519 | 506 | 569 |
| 0.3in ² | 597 | 579 | 563 | 635 |
| 0.35in ² | 653 | 633 | 614 | 701 |
| 0.4in ² | 704 | 682 | 663 | 757 |
| 0.45in ² | 747 | 723 | 702 | 807 |
| 0.5in ² | 796 | 770 | 747 | 870 |
| 0.55in ² | 840 | 814 | 791 | 914 |
| 0.6in ² | 882 | 854 | 828 | 969 |
| 0.65in ² | 918 | 888 | 862 | 1012 |
| 0.75in ² | 992 | 960 | 931 | 1103 |
| 0.85in ² | 1036 | 1024 | 994 | 1167 |
| 1.0in ² | 1186 | 1150 | 1115 | 1336 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Imperial sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 418 | 421 | 412 | 569 |
| 0.3in ² | 464 | 467 | 457 | 635 |
| 0.35in ² | 504 | 508 | 497 | 701 |
| 0.4in ² | 543 | 547 | 535 | 757 |
| 0.45in ² | 574 | 579 | 565 | 807 |
| 0.5in ² | 608 | 613 | 599 | 870 |
| 0.55in ² | 644 | 648 | 633 | 914 |
| 0.6in ² | 672 | 677 | 661 | 969 |
| 0.65in ² | 697 | 704 | 687 | 1012 |
| 0.75in ² | 750 | 757 | 739 | 1103 |
| 0.85in ² | 800 | 806 | 787 | 1167 |
| 1.0in ² | 890 | 898 | 876 | 1336 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 498 | 490 | 478 | 569 |
| 0.3in ² | 554 | 546 | 532 | 635 |
| 0.35in ² | 605 | 596 | 580 | 701 |
| 0.4in ² | 652 | 642 | 625 | 757 |
| 0.45in ² | 691 | 681 | 662 | 807 |
| 0.5in ² | 735 | 724 | 703 | 870 |
| 0.55in ² | 777 | 765 | 745 | 914 |
| 0.6in ² | 815 | 802 | 780 | 969 |
| 0.65in ² | 847 | 834 | 811 | 1012 |
| 0.75in ² | 915 | 901 | 875 | 1103 |
| 0.85in ² | 975 | 961 | 935 | 1167 |
| 1.0in ² | 1092 | 1077 | 1046 | 1336 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 441 | 440 | 430 | 569 |
| 0.3in ² | 490 | 488 | 477 | 635 |
| 0.35in ² | 533 | 531 | 519 | 701 |
| 0.4in ² | 574 | 572 | 558 | 757 |
| 0.45in ² | 607 | 605 | 590 | 807 |
| 0.5in ² | 643 | 642 | 626 | 870 |
| 0.55in ² | 681 | 678 | 662 | 914 |
| 0.6in ² | 711 | 710 | 692 | 969 |
| 0.65in ² | 739 | 737 | 718 | 1012 |
| 0.75in ² | 795 | 794 | 773 | 1103 |
| 0.85in ² | 847 | 845 | 823 | 1167 |
| 1.0in ² | 944 | 943 | 918 | 1336 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED LEAD SHEATHED DUCTED CABLES IN
FLAT SPACED FORMATION**

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 522 | 508 | 495 | 569 |
| 0.3in ² | 581 | 566 | 551 | 635 |
| 0.35in ² | 635 | 619 | 601 | 701 |
| 0.4in ² | 685 | 667 | 649 | 757 |
| 0.45in ² | 726 | 707 | 687 | 807 |
| 0.5in ² | 773 | 753 | 731 | 870 |
| 0.55in ² | 817 | 796 | 773 | 914 |
| 0.6in ² | 857 | 834 | 810 | 969 |
| 0.65in ² | 891 | 868 | 843 | 1012 |
| 0.75in ² | 963 | 938 | 910 | 1103 |
| 0.85in ² | 1026 | 1000 | 972 | 1167 |
| 1.0in ² | 1151 | 1122 | 1089 | 1336 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 343 | 321 | 312 | 336 |
| 150mm ² Al | 380 | 354 | 343 | 374 |
| 185mm ² Al | 428 | 395 | 382 | 423 |
| 240mm ² Al | 496 | 450 | 434 | 496 |
| 260mm ² Al | 517 | 465 | 449 | 521 |
| 300mm ² Al | 558 | 498 | 479 | 564 |
| 350mm ² Al | 599 | 526 | 506 | 614 |
| 400mm ² Al | 631 | 549 | 528 | 652 |
| 500mm ² Al | 709 | 606 | 580 | 743 |
| 630mm ² Al | 790 | 664 | 634 | 840 |
| 800mm ² Al | 873 | 721 | 687 | 950 |
| 1000mm ² Al | 953 | 780 | 743 | 1055 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 439 | 403 | 389 | 430 |
| 150mm ² | 487 | 442 | 427 | 479 |
| 185mm ² | 546 | 489 | 471 | 540 |
| 240mm ² | 629 | 550 | 530 | 629 |
| 260mm ² | 652 | 565 | 544 | 659 |
| 300mm ² | 703 | 602 | 578 | 713 |
| 350mm ² | 748 | 630 | 603 | 770 |
| 400mm ² | 784 | 653 | 624 | 814 |
| 500mm ² | 869 | 709 | 676 | 917 |
| 630mm ² | 951 | 764 | 729 | 1020 |
| 800mm ² | 1027 | 818 | 778 | 1129 |
| 1000mm ² | 1097 | 873 | 830 | 1227 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN
TREFOIL FORMATION**

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 284 | 270 | 262 | 336 |
| 150mm ² Al | 315 | 296 | 288 | 374 |
| 185mm ² Al | 353 | 328 | 319 | 423 |
| 240mm ² Al | 407 | 372 | 360 | 496 |
| 260mm ² Al | 422 | 383 | 370 | 521 |
| 300mm ² Al | 455 | 408 | 394 | 564 |
| 350mm ² Al | 485 | 428 | 412 | 614 |
| 400mm ² Al | 509 | 445 | 428 | 652 |
| 500mm ² Al | 566 | 486 | 466 | 743 |
| 630mm ² Al | 627 | 527 | 504 | 840 |
| 800mm ² Al | 686 | 567 | 540 | 950 |
| 1000mm ² Al | 744 | 607 | 577 | 1055 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 363 | 336 | 326 | 430 |
| 150mm ² | 402 | 367 | 356 | 479 |
| 185mm ² | 450 | 404 | 390 | 540 |
| 240mm ² | 514 | 451 | 434 | 629 |
| 260mm ² | 532 | 461 | 444 | 659 |
| 300mm ² | 571 | 489 | 470 | 713 |
| 350mm ² | 603 | 507 | 486 | 770 |
| 400mm ² | 629 | 523 | 500 | 814 |
| 500mm ² | 691 | 562 | 536 | 917 |
| 630mm ² | 751 | 599 | 570 | 1020 |
| 800mm ² | 804 | 633 | 601 | 1129 |
| 1000mm ² | 853 | 667 | 632 | 1227 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/w |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 327 | 312 | 303 | 336 |
| 150mm ² Al | 363 | 344 | 334 | 374 |
| 185mm ² Al | 408 | 383 | 371 | 423 |
| 240mm ² Al | 473 | 436 | 422 | 496 |
| 260mm ² Al | 492 | 450 | 435 | 521 |
| 300mm ² Al | 530 | 481 | 465 | 564 |
| 350mm ² Al | 568 | 508 | 490 | 614 |
| 400mm ² Al | 598 | 530 | 511 | 652 |
| 500mm ² Al | 671 | 583 | 560 | 743 |
| 630mm ² Al | 746 | 637 | 610 | 840 |
| 800mm ² Al | 822 | 690 | 660 | 950 |
| 1000mm ² Al | 896 | 745 | 712 | 1055 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 419 | 391 | 379 | 430 |
| 150mm ² | 464 | 429 | 415 | 479 |
| 185mm ² | 520 | 473 | 458 | 540 |
| 240mm ² | 598 | 532 | 514 | 629 |
| 260mm ² | 620 | 547 | 527 | 659 |
| 300mm ² | 668 | 582 | 560 | 713 |
| 350mm ² | 710 | 607 | 583 | 770 |
| 400mm ² | 742 | 628 | 602 | 814 |
| 500mm ² | 821 | 681 | 651 | 917 |
| 630mm ² | 897 | 733 | 701 | 1020 |
| 800mm ² | 966 | 782 | 747 | 1129 |
| 1000mm ² | 1030 | 833 | 795 | 1227 |

Parameters

Cables laid in trefoil formation & solidly bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 1.05°C m/W

Ground Ambient Temperature 12°C

Air Ambient Temperature 12°C

Maximum Conductor Temperature 85°C

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN
TREFOIL FORMATION**

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 260 | 250 | 244 | 336 |
| 150mm ² Al | 288 | 275 | 268 | 374 |
| 185mm ² Al | 323 | 305 | 296 | 423 |
| 240mm ² Al | 372 | 345 | 334 | 496 |
| 260mm ² Al | 386 | 354 | 343 | 521 |
| 300mm ² Al | 415 | 377 | 365 | 564 |
| 350mm ² Al | 441 | 395 | 382 | 614 |
| 400mm ² Al | 463 | 410 | 396 | 652 |
| 500mm ² Al | 515 | 447 | 430 | 743 |
| 630mm ² Al | 569 | 485 | 465 | 840 |
| 800mm ² Al | 621 | 520 | 497 | 950 |
| 1000mm ² Al | 673 | 556 | 530 | 1055 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 333 | 312 | 304 | 430 |
| 150mm ² | 368 | 341 | 331 | 479 |
| 185mm ² | 411 | 375 | 363 | 540 |
| 240mm ² | 470 | 418 | 403 | 629 |
| 260mm ² | 485 | 427 | 411 | 659 |
| 300mm ² | 521 | 452 | 435 | 713 |
| 350mm ² | 549 | 468 | 449 | 770 |
| 400mm ² | 572 | 481 | 462 | 814 |
| 500mm ² | 628 | 517 | 495 | 917 |
| 630mm ² | 681 | 550 | 525 | 1020 |
| 800mm ² | 727 | 580 | 552 | 1129 |
| 1000mm ² | 771 | 610 | 580 | 1227 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/w |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Summer CYCLIC Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 302 | 293 | 286 | 336 |
| 150mm ² Al | 335 | 323 | 314 | 374 |
| 185mm ² Al | 377 | 359 | 349 | 423 |
| 240mm ² Al | 436 | 408 | 396 | 496 |
| 260mm ² Al | 453 | 421 | 408 | 521 |
| 300mm ² Al | 488 | 450 | 435 | 564 |
| 350mm ² Al | 522 | 474 | 458 | 614 |
| 400mm ² Al | 549 | 494 | 477 | 652 |
| 500mm ² Al | 614 | 542 | 521 | 743 |
| 630mm ² Al | 682 | 591 | 568 | 840 |
| 800mm ² Al | 749 | 638 | 612 | 950 |
| 1000mm ² Al | 816 | 688 | 660 | 1055 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 387 | 367 | 356 | 430 |
| 150mm ² | 429 | 402 | 390 | 479 |
| 185mm ² | 480 | 444 | 430 | 540 |
| 240mm ² | 551 | 498 | 482 | 629 |
| 260mm ² | 571 | 511 | 493 | 659 |
| 300mm ² | 614 | 543 | 524 | 713 |
| 350mm ² | 652 | 566 | 544 | 770 |
| 400mm ² | 681 | 584 | 562 | 814 |
| 500mm ² | 751 | 632 | 606 | 917 |
| 630mm ² | 819 | 679 | 651 | 1020 |
| 800mm ² | 879 | 722 | 692 | 1129 |
| 1000mm ² | 937 | 768 | 735 | 1227 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|------------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 275 | 262 | 255 | 336 |
| 150mm ² Al | 305 | 288 | 280 | 374 |
| 185mm ² Al | 342 | 320 | 310 | 423 |
| 240mm ² Al | 394 | 362 | 350 | 496 |
| 260mm ² Al | 409 | 372 | 360 | 521 |
| 300mm ² Al | 440 | 397 | 383 | 564 |
| 350mm ² Al | 468 | 416 | 401 | 614 |
| 400mm ² Al | 492 | 432 | 416 | 652 |
| 500mm ² Al | 547 | 472 | 453 | 743 |
| 630mm ² Al | 605 | 511 | 490 | 840 |
| 800mm ² Al | 662 | 549 | 524 | 950 |
| 1000mm ² Al | 718 | 588 | 560 | 1055 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 352 | 327 | 318 | 430 |
| 150mm ² | 389 | 358 | 346 | 479 |
| 185mm ² | 435 | 393 | 380 | 540 |
| 240mm ² | 498 | 439 | 423 | 629 |
| 260mm ² | 514 | 448 | 432 | 659 |
| 300mm ² | 552 | 475 | 457 | 713 |
| 350mm ² | 583 | 493 | 472 | 770 |
| 400mm ² | 608 | 507 | 486 | 814 |
| 500mm ² | 668 | 545 | 521 | 917 |
| 630mm ² | 725 | 581 | 553 | 1020 |
| 800mm ² | 775 | 613 | 582 | 1129 |
| 1000mm ² | 823 | 646 | 612 | 1227 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/w |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 318 | 305 | 297 | 336 |
| 150mm ² Al | 353 | 336 | 327 | 374 |
| 185mm ² Al | 396 | 374 | 363 | 423 |
| 240mm ² Al | 459 | 426 | 412 | 496 |
| 260mm ² Al | 477 | 439 | 425 | 521 |
| 300mm ² Al | 515 | 469 | 454 | 564 |
| 350mm ² Al | 551 | 495 | 478 | 614 |
| 400mm ² Al | 580 | 516 | 498 | 652 |
| 500mm ² Al | 650 | 568 | 545 | 743 |
| 630mm ² Al | 723 | 620 | 595 | 840 |
| 800mm ² Al | 795 | 671 | 642 | 950 |
| 1000mm ² Al | 866 | 724 | 693 | 1055 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 407 | 382 | 371 | 430 |
| 150mm ² | 451 | 419 | 406 | 479 |
| 185mm ² | 505 | 462 | 448 | 540 |
| 240mm ² | 581 | 520 | 502 | 629 |
| 260mm ² | 602 | 533 | 514 | 659 |
| 300mm ² | 648 | 567 | 546 | 713 |
| 350mm ² | 688 | 592 | 568 | 770 |
| 400mm ² | 719 | 612 | 587 | 814 |
| 500mm ² | 795 | 663 | 635 | 917 |
| 630mm ² | 867 | 712 | 682 | 1020 |
| 800mm ² | 933 | 759 | 726 | 1129 |
| 1000mm ² | 996 | 808 | 773 | 1227 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Imperial sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 444 | 392 | 378 | 505 |
| 0.3in ² | 486 | 422 | 407 | 555 |
| 0.35in ² | 522 | 450 | 433 | 600 |
| 0.4in ² | 563 | 480 | 460 | 657 |
| 0.45in ² | 591 | 497 | 476 | 696 |
| 0.5in ² | 616 | 511 | 489 | 731 |
| 0.55in ² | 648 | 531 | 507 | 773 |
| 0.6in ² | 666 | 545 | 520 | 803 |
| 0.65in ² | 688 | 557 | 530 | 843 |
| 0.75in ² | 723 | 577 | 549 | 892 |
| 0.85in ² | 754 | 597 | 568 | 943 |
| 1.0in ² | 811 | 638 | 605 | 1030 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 508 | 453 | 438 | 505 |
| 0.3in ² | 558 | 490 | 473 | 555 |
| 0.35in ² | 600 | 525 | 506 | 600 |
| 0.4in ² | 651 | 562 | 541 | 657 |
| 0.45in ² | 685 | 585 | 562 | 696 |
| 0.5in ² | 715 | 604 | 579 | 731 |
| 0.55in ² | 753 | 629 | 602 | 773 |
| 0.6in ² | 776 | 647 | 619 | 803 |
| 0.65in ² | 805 | 664 | 634 | 843 |
| 0.75in ² | 849 | 690 | 659 | 892 |
| 0.85in ² | 889 | 718 | 686 | 943 |
| 1.0in ² | 960 | 774 | 740 | 1030 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Imperial sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 418 | 375 | 363 | 505 |
| 0.3in ² | 458 | 404 | 390 | 555 |
| 0.35in ² | 493 | 431 | 415 | 600 |
| 0.4in ² | 530 | 458 | 441 | 657 |
| 0.45in ² | 556 | 474 | 456 | 696 |
| 0.5in ² | 578 | 488 | 468 | 731 |
| 0.55in ² | 608 | 506 | 485 | 773 |
| 0.6in ² | 625 | 519 | 497 | 803 |
| 0.65in ² | 644 | 530 | 507 | 843 |
| 0.75in ² | 677 | 548 | 524 | 892 |
| 0.85in ² | 705 | 567 | 541 | 943 |
| 1.0in ² | 759 | 605 | 577 | 1030 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN
TREFOIL FORMATION**

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 484 | 439 | 425 | 505 |
| 0.3in ² | 531 | 475 | 459 | 555 |
| 0.35in ² | 572 | 508 | 491 | 600 |
| 0.4in ² | 619 | 544 | 525 | 657 |
| 0.45in ² | 650 | 564 | 544 | 696 |
| 0.5in ² | 678 | 582 | 560 | 731 |
| 0.55in ² | 714 | 606 | 582 | 773 |
| 0.6in ² | 736 | 624 | 598 | 803 |
| 0.65in ² | 762 | 638 | 612 | 843 |
| 0.75in ² | 802 | 663 | 635 | 892 |
| 0.85in ² | 839 | 689 | 660 | 943 |
| 1.0in ² | 906 | 742 | 711 | 1030 |

Parameters

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN TREFOIL FORMATION

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 382 | 348 | 337 | 505 |
| 0.3in ² | 419 | 374 | 363 | 555 |
| 0.35in ² | 450 | 399 | 386 | 600 |
| 0.4in ² | 484 | 424 | 409 | 657 |
| 0.45in ² | 507 | 438 | 422 | 696 |
| 0.5in ² | 527 | 450 | 433 | 731 |
| 0.55in ² | 554 | 467 | 449 | 773 |
| 0.6in ² | 569 | 479 | 460 | 803 |
| 0.65in ² | 585 | 488 | 468 | 843 |
| 0.75in ² | 614 | 504 | 483 | 892 |
| 0.85in ² | 640 | 521 | 499 | 943 |
| 1.0in ² | 689 | 556 | 531 | 1030 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN
TREFOIL FORMATION**

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|-------------------------------------|-------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 446 | 412 | 399 | 505 |
| 0.3in ² | 490 | 445 | 431 | 555 |
| 0.35in ² | 527 | 476 | 461 | 600 |
| 0.4in ² | 570 | 508 | 491 | 657 |
| 0.45in ² | 598 | 527 | 508 | 696 |
| 0.5in ² | 623 | 543 | 523 | 731 |
| 0.55in ² | 656 | 565 | 543 | 773 |
| 0.6in ² | 676 | 581 | 559 | 803 |
| 0.65in ² | 698 | 593 | 570 | 843 |
| 0.75in ² | 734 | 615 | 591 | 892 |
| 0.85in ² | 767 | 639 | 614 | 943 |
| 1.0in ² | 828 | 688 | 661 | 1030 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN
TREFOIL FORMATION**

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 405 | 365 | 353 | 505 |
| 0.3in ² | 444 | 393 | 380 | 555 |
| 0.35in ² | 477 | 419 | 404 | 600 |
| 0.4in ² | 513 | 445 | 429 | 657 |
| 0.45in ² | 537 | 461 | 443 | 696 |
| 0.5in ² | 559 | 474 | 455 | 731 |
| 0.55in ² | 588 | 492 | 472 | 773 |
| 0.6in ² | 604 | 504 | 483 | 803 |
| 0.65in ² | 622 | 514 | 492 | 843 |
| 0.75in ² | 654 | 532 | 509 | 892 |
| 0.85in ² | 681 | 550 | 526 | 943 |
| 1.0in ² | 733 | 587 | 560 | 1030 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

**132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN
TREFOIL FORMATION**

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|-------------------------------------|----------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 470 | 429 | 416 | 505 |
| 0.3in ² | 516 | 464 | 449 | 555 |
| 0.35in ² | 555 | 496 | 480 | 600 |
| 0.4in ² | 601 | 530 | 512 | 657 |
| 0.45in ² | 631 | 550 | 531 | 696 |
| 0.5in ² | 658 | 568 | 546 | 731 |
| 0.55in ² | 693 | 591 | 568 | 773 |
| 0.6in ² | 713 | 607 | 584 | 803 |
| 0.65in ² | 738 | 621 | 596 | 843 |
| 0.75in ² | 777 | 645 | 619 | 892 |
| 0.85in ² | 812 | 670 | 643 | 943 |
| 1.0in ² | 877 | 722 | 693 | 1030 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 318 | 310 | 302 | 375 |
| 150mm ² Al | 354 | 344 | 335 | 419 |
| 185mm ² Al | 399 | 388 | 378 | 475 |
| 240mm ² Al | 464 | 452 | 439 | 561 |
| 260mm ² Al | 485 | 472 | 459 | 591 |
| 300mm ² Al | 525 | 511 | 496 | 642 |
| 350mm ² Al | 568 | 553 | 537 | 707 |
| 400mm ² Al | 603 | 587 | 570 | 757 |
| 500mm ² Al | 685 | 668 | 647 | 876 |
| 630mm ² Al | 780 | 762 | 738 | 1012 |
| 800mm ² Al | 886 | 868 | 840 | 1179 |
| 1000mm ² Al | 992 | 976 | 943 | 1342 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 410 | 399 | 389 | 484 |
| 150mm ² | 456 | 444 | 433 | 540 |
| 185mm ² | 514 | 501 | 487 | 612 |
| 240mm ² | 596 | 581 | 565 | 721 |
| 260mm ² | 623 | 607 | 590 | 759 |
| 300mm ² | 673 | 657 | 639 | 825 |
| 350mm ² | 728 | 711 | 691 | 907 |
| 400mm ² | 771 | 755 | 732 | 970 |
| 500mm ² | 871 | 854 | 828 | 1118 |
| 630mm ² | 986 | 971 | 941 | 1282 |
| 800mm ² | 1108 | 1098 | 1062 | 1479 |
| 1000mm ² | 1221 | 1216 | 1177 | 1658 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/w |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 370 | 351 | 342 | 375 |
| 150mm ² Al | 412 | 392 | 381 | 419 |
| 185mm ² Al | 466 | 443 | 431 | 475 |
| 240mm ² Al | 545 | 518 | 503 | 561 |
| 260mm ² Al | 571 | 543 | 526 | 591 |
| 300mm ² Al | 619 | 588 | 570 | 642 |
| 350mm ² Al | 674 | 640 | 619 | 707 |
| 400mm ² Al | 717 | 681 | 659 | 757 |
| 500mm ² Al | 820 | 778 | 752 | 876 |
| 630mm ² Al | 938 | 892 | 862 | 1012 |
| 800mm ² Al | 1073 | 1023 | 987 | 1179 |
| 1000mm ² Al | 1209 | 1156 | 1115 | 1342 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 477 | 454 | 442 | 484 |
| 150mm ² | 531 | 506 | 492 | 540 |
| 185mm ² | 600 | 572 | 556 | 612 |
| 240mm ² | 700 | 667 | 647 | 721 |
| 260mm ² | 733 | 699 | 678 | 759 |
| 300mm ² | 795 | 758 | 735 | 825 |
| 350mm ² | 864 | 824 | 798 | 907 |
| 400mm ² | 918 | 877 | 848 | 970 |
| 500mm ² | 1044 | 998 | 965 | 1118 |
| 630mm ² | 1187 | 1140 | 1103 | 1282 |
| 800mm ² | 1345 | 1298 | 1254 | 1479 |
| 1000mm ² | 1491 | 1447 | 1399 | 1658 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 302 | 299 | 292 | 375 |
| 150mm ² Al | 335 | 333 | 325 | 419 |
| 185mm ² Al | 378 | 375 | 366 | 475 |
| 240mm ² Al | 439 | 436 | 425 | 561 |
| 260mm ² Al | 459 | 455 | 444 | 591 |
| 300mm ² Al | 496 | 492 | 479 | 642 |
| 350mm ² Al | 536 | 532 | 518 | 707 |
| 400mm ² Al | 568 | 565 | 550 | 757 |
| 500mm ² Al | 644 | 641 | 623 | 876 |
| 630mm ² Al | 733 | 731 | 710 | 1012 |
| 800mm ² Al | 831 | 830 | 806 | 1179 |
| 1000mm ² Al | 930 | 932 | 905 | 1342 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 388 | 386 | 377 | 484 |
| 150mm ² | 432 | 429 | 419 | 540 |
| 185mm ² | 487 | 483 | 472 | 612 |
| 240mm ² | 564 | 560 | 546 | 721 |
| 260mm ² | 588 | 585 | 570 | 759 |
| 300mm ² | 636 | 633 | 617 | 825 |
| 350mm ² | 687 | 684 | 666 | 907 |
| 400mm ² | 727 | 725 | 706 | 970 |
| 500mm ² | 820 | 820 | 798 | 1118 |
| 630mm ² | 927 | 931 | 906 | 1282 |
| 800mm ² | 1039 | 1050 | 1020 | 1479 |
| 1000mm ² | 1145 | 1162 | 1129 | 1658 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/w |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 355 | 343 | 335 | 375 |
| 150mm ² Al | 396 | 383 | 373 | 419 |
| 185mm ² Al | 447 | 432 | 421 | 475 |
| 240mm ² Al | 522 | 505 | 491 | 561 |
| 260mm ² Al | 546 | 529 | 514 | 591 |
| 300mm ² Al | 592 | 573 | 556 | 642 |
| 350mm ² Al | 643 | 623 | 604 | 707 |
| 400mm ² Al | 684 | 662 | 642 | 757 |
| 500mm ² Al | 780 | 755 | 732 | 876 |
| 630mm ² Al | 892 | 865 | 838 | 1012 |
| 800mm ² Al | 1019 | 990 | 958 | 1179 |
| 1000mm ² Al | 1146 | 1117 | 1081 | 1342 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 458 | 443 | 432 | 484 |
| 150mm ² | 510 | 494 | 482 | 540 |
| 185mm ² | 575 | 559 | 544 | 612 |
| 240mm ² | 670 | 651 | 632 | 721 |
| 260mm ² | 701 | 681 | 662 | 759 |
| 300mm ² | 760 | 738 | 717 | 825 |
| 350mm ² | 825 | 802 | 778 | 907 |
| 400mm ² | 876 | 852 | 827 | 970 |
| 500mm ² | 994 | 969 | 939 | 1118 |
| 630mm ² | 1129 | 1106 | 1072 | 1282 |
| 800mm ² | 1277 | 1256 | 1217 | 1479 |
| 1000mm ² | 1412 | 1398 | 1356 | 1658 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 1.05°C m/W

Ground Ambient Temperature 12°C

Air Ambient Temperature 12°C

Maximum Conductor Temperature 85°C

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|------------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 277 | 280 | 274 | 375 |
| 150mm ² Al | 308 | 311 | 304 | 419 |
| 185mm ² Al | 347 | 350 | 342 | 475 |
| 240mm ² Al | 403 | 406 | 397 | 561 |
| 260mm ² Al | 420 | 424 | 415 | 591 |
| 300mm ² Al | 454 | 458 | 448 | 642 |
| 350mm ² Al | 490 | 495 | 483 | 707 |
| 400mm ² Al | 519 | 525 | 512 | 757 |
| 500mm ² Al | 588 | 595 | 580 | 876 |
| 630mm ² Al | 668 | 677 | 660 | 1012 |
| 800mm ² Al | 756 | 768 | 748 | 1179 |
| 1000mm ² Al | 845 | 861 | 839 | 1342 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 357 | 360 | 353 | 484 |
| 150mm ² | 397 | 401 | 392 | 540 |
| 185mm ² | 447 | 451 | 442 | 612 |
| 240mm ² | 517 | 522 | 511 | 721 |
| 260mm ² | 539 | 545 | 533 | 759 |
| 300mm ² | 582 | 589 | 576 | 825 |
| 350mm ² | 628 | 636 | 621 | 907 |
| 400mm ² | 664 | 674 | 658 | 970 |
| 500mm ² | 748 | 761 | 742 | 1118 |
| 630mm ² | 845 | 863 | 842 | 1282 |
| 800mm ² | 945 | 971 | 946 | 1479 |
| 1000mm ² | 1040 | 1073 | 1046 | 1658 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/w |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Summer CYCLIC Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 330 | 324 | 317 | 375 |
| 150mm ² Al | 367 | 361 | 353 | 419 |
| 185mm ² Al | 414 | 408 | 398 | 475 |
| 240mm ² Al | 483 | 476 | 464 | 561 |
| 260mm ² Al | 506 | 498 | 485 | 591 |
| 300mm ² Al | 547 | 539 | 525 | 642 |
| 350mm ² Al | 594 | 585 | 569 | 707 |
| 400mm ² Al | 631 | 622 | 604 | 757 |
| 500mm ² Al | 719 | 708 | 688 | 876 |
| 630mm ² Al | 821 | 810 | 787 | 1012 |
| 800mm ² Al | 936 | 925 | 897 | 1179 |
| 1000mm ² Al | 1051 | 1042 | 1011 | 1342 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 425 | 418 | 409 | 484 |
| 150mm ² | 473 | 466 | 455 | 540 |
| 185mm ² | 534 | 527 | 514 | 612 |
| 240mm ² | 621 | 613 | 597 | 721 |
| 260mm ² | 649 | 641 | 624 | 759 |
| 300mm ² | 703 | 695 | 676 | 825 |
| 350mm ² | 762 | 753 | 733 | 907 |
| 400mm ² | 808 | 800 | 778 | 970 |
| 500mm ² | 916 | 908 | 882 | 1118 |
| 630mm ² | 1039 | 1035 | 1006 | 1282 |
| 800mm ² | 1171 | 1173 | 1139 | 1479 |
| 1000mm ² | 1294 | 1304 | 1268 | 1658 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 292 | 292 | 285 | 375 |
| 150mm ² Al | 325 | 325 | 317 | 419 |
| 185mm ² Al | 366 | 366 | 357 | 475 |
| 240mm ² Al | 426 | 425 | 415 | 561 |
| 260mm ² Al | 444 | 443 | 433 | 591 |
| 300mm ² Al | 480 | 479 | 468 | 642 |
| 350mm ² Al | 519 | 518 | 505 | 707 |
| 400mm ² Al | 550 | 550 | 536 | 757 |
| 500mm ² Al | 623 | 623 | 607 | 876 |
| 630mm ² Al | 709 | 711 | 692 | 1012 |
| 800mm ² Al | 803 | 807 | 788 | 1179 |
| 1000mm ² Al | 899 | 906 | 880 | 1342 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 377 | 376 | 368 | 484 |
| 150mm ² | 419 | 418 | 409 | 540 |
| 185mm ² | 472 | 471 | 460 | 612 |
| 240mm ² | 546 | 546 | 533 | 721 |
| 260mm ² | 570 | 570 | 556 | 759 |
| 300mm ² | 616 | 617 | 602 | 825 |
| 350mm ² | 665 | 666 | 650 | 907 |
| 400mm ² | 703 | 706 | 688 | 970 |
| 500mm ² | 793 | 798 | 777 | 1118 |
| 630mm ² | 896 | 906 | 882 | 1282 |
| 800mm ² | 1004 | 1020 | 993 | 1479 |
| 1000mm ² | 1106 | 1129 | 1098 | 1658 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/w |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Metric sizes</u> | | PVC | Rigiduct | |
| <u>Aluminium conductors</u> | | | | |
| 120mm ² Al | 346 | 336 | 328 | 375 |
| 150mm ² Al | 385 | 375 | 366 | 419 |
| 185mm ² Al | 435 | 423 | 412 | 475 |
| 240mm ² Al | 507 | 494 | 481 | 561 |
| 260mm ² Al | 531 | 518 | 503 | 591 |
| 300mm ² Al | 575 | 561 | 544 | 642 |
| 350mm ² Al | 625 | 609 | 591 | 707 |
| 400mm ² Al | 664 | 647 | 628 | 757 |
| 500mm ² Al | 758 | 738 | 715 | 876 |
| 630mm ² Al | 866 | 845 | 819 | 1012 |
| 800mm ² Al | 988 | 966 | 935 | 1179 |
| 1000mm ² Al | 1111 | 1089 | 1055 | 1342 |
| <u>Copper conductors</u> | | | | |
| 120mm ² | 445 | 434 | 423 | 484 |
| 150mm ² | 496 | 484 | 472 | 540 |
| 185mm ² | 560 | 547 | 532 | 612 |
| 240mm ² | 652 | 637 | 619 | 721 |
| 260mm ² | 682 | 666 | 648 | 759 |
| 300mm ² | 739 | 722 | 702 | 825 |
| 350mm ² | 801 | 784 | 761 | 907 |
| 400mm ² | 851 | 833 | 808 | 970 |
| 500mm ² | 965 | 946 | 918 | 1118 |
| 630mm ² | 1096 | 1079 | 1048 | 1282 |
| 800mm ² | 1237 | 1225 | 1188 | 1479 |
| 1000mm ² | 1368 | 1363 | 1323 | 1658 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 482 | 470 | 457 | 576 |
| 0.3in ² | 533 | 519 | 506 | 637 |
| 0.35in ² | 575 | 561 | 546 | 688 |
| 0.4in ² | 626 | 611 | 594 | 760 |
| 0.45in ² | 663 | 648 | 630 | 813 |
| 0.5in ² | 699 | 683 | 663 | 861 |
| 0.55in ² | 740 | 724 | 703 | 916 |
| 0.6in ² | 770 | 753 | 731 | 954 |
| 0.65in ² | 807 | 790 | 766 | 1020 |
| 0.75in ² | 863 | 847 | 822 | 1098 |
| 0.85in ² | 921 | 907 | 879 | 1181 |
| 1.0in ² | 1017 | 1003 | 973 | 1306 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 563 | 536 | 522 | 576 |
| 0.3in ² | 623 | 594 | 577 | 637 |
| 0.35in ² | 673 | 644 | 625 | 688 |
| 0.4in ² | 737 | 704 | 682 | 760 |
| 0.45in ² | 783 | 747 | 724 | 813 |
| 0.5in ² | 826 | 789 | 765 | 861 |
| 0.55in ² | 876 | 838 | 811 | 916 |
| 0.6in ² | 912 | 873 | 847 | 954 |
| 0.65in ² | 962 | 919 | 889 | 1020 |
| 0.75in ² | 1031 | 987 | 955 | 1098 |
| 0.85in ² | 1104 | 1060 | 1025 | 1181 |
| 1.0in ² | 1220 | 1177 | 1141 | 1306 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 456 | 454 | 443 | 576 |
| 0.3in ² | 504 | 501 | 489 | 637 |
| 0.35in ² | 545 | 542 | 529 | 688 |
| 0.4in ² | 592 | 589 | 575 | 760 |
| 0.45in ² | 627 | 624 | 608 | 813 |
| 0.5in ² | 660 | 657 | 641 | 861 |
| 0.55in ² | 698 | 697 | 679 | 916 |
| 0.6in ² | 727 | 724 | 706 | 954 |
| 0.65in ² | 760 | 759 | 739 | 1020 |
| 0.75in ² | 812 | 813 | 791 | 1098 |
| 0.85in ² | 867 | 870 | 846 | 1181 |
| 1.0in ² | 957 | 962 | 936 | 1306 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 540 | 524 | 510 | 576 |
| 0.3in ² | 596 | 579 | 564 | 637 |
| 0.35in ² | 645 | 628 | 611 | 688 |
| 0.4in ² | 705 | 686 | 667 | 760 |
| 0.45in ² | 748 | 728 | 707 | 813 |
| 0.5in ² | 789 | 768 | 746 | 861 |
| 0.55in ² | 837 | 815 | 792 | 916 |
| 0.6in ² | 871 | 850 | 826 | 954 |
| 0.65in ² | 916 | 893 | 866 | 1020 |
| 0.75in ² | 982 | 959 | 930 | 1098 |
| 0.85in ² | 1050 | 1028 | 998 | 1181 |
| 1.0in ² | 1163 | 1142 | 1110 | 1306 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Imperial sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 419 | 423 | 414 | 576 |
| 0.3in ² | 462 | 468 | 458 | 637 |
| 0.35in ² | 500 | 506 | 495 | 688 |
| 0.4in ² | 543 | 549 | 537 | 760 |
| 0.45in ² | 574 | 581 | 568 | 813 |
| 0.5in ² | 603 | 612 | 598 | 861 |
| 0.55in ² | 639 | 649 | 634 | 916 |
| 0.6in ² | 665 | 674 | 658 | 954 |
| 0.65in ² | 693 | 705 | 688 | 1020 |
| 0.75in ² | 740 | 755 | 737 | 1098 |
| 0.85in ² | 790 | 807 | 787 | 1181 |
| 1.0in ² | 874 | 893 | 871 | 1306 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS - AMPS | | | |
|----------------------------------|-------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 500 | 494 | 482 | 576 |
| 0.3in ² | 553 | 546 | 533 | 637 |
| 0.35in ² | 598 | 592 | 577 | 688 |
| 0.4in ² | 653 | 646 | 629 | 760 |
| 0.45in ² | 692 | 685 | 667 | 813 |
| 0.5in ² | 729 | 722 | 703 | 861 |
| 0.55in ² | 773 | 766 | 746 | 916 |
| 0.6in ² | 805 | 799 | 777 | 954 |
| 0.65in ² | 845 | 838 | 814 | 1020 |
| 0.75in ² | 904 | 899 | 874 | 1098 |
| 0.85in ² | 967 | 964 | 937 | 1181 |
| 1.0in ² | 1072 | 1070 | 1042 | 1306 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Imperial sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 442 | 442 | 432 | 576 |
| 0.3in ² | 488 | 489 | 477 | 637 |
| 0.35in ² | 528 | 528 | 516 | 688 |
| 0.4in ² | 574 | 574 | 561 | 760 |
| 0.45in ² | 607 | 608 | 593 | 813 |
| 0.5in ² | 639 | 640 | 625 | 861 |
| 0.55in ² | 676 | 679 | 662 | 916 |
| 0.6in ² | 704 | 706 | 688 | 954 |
| 0.65in ² | 735 | 739 | 720 | 1020 |
| 0.75in ² | 785 | 792 | 771 | 1098 |
| 0.85in ² | 838 | 846 | 824 | 1181 |
| 1.0in ² | 926 | 936 | 912 | 1306 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE OIL FILLED CAS SHEATHED DUCTED CABLES IN FLAT SPACED FORMATION

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS - AMPS | | | |
|----------------------------------|----------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.25in ² | 525 | 512 | 499 | 576 |
| 0.3in ² | 580 | 567 | 552 | 637 |
| 0.35in ² | 628 | 615 | 598 | 688 |
| 0.4in ² | 686 | 671 | 652 | 760 |
| 0.45in ² | 727 | 712 | 692 | 813 |
| 0.5in ² | 767 | 751 | 730 | 861 |
| 0.55in ² | 813 | 797 | 774 | 916 |
| 0.6in ² | 847 | 831 | 808 | 954 |
| 0.65in ² | 890 | 872 | 847 | 1020 |
| 0.75in ² | 953 | 936 | 909 | 1098 |
| 0.85in ² | 1019 | 1004 | 975 | 1181 |
| 1.0in ² | 1129 | 1115 | 1084 | 1306 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings based on Crater for oil filled cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID IN TREFOIL.

Winter SUSTAINED Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 383 | 351 | 339 | 422 |
| 0.25in ² Cu | 430 | 389 | 375 | 481 |
| 0.3in ² Cu. | 477 | 425 | 409 | 539 |
| 0.35in ² Cu | 513 | 452 | 434 | 588 |
| 0.4in ² Cu | 550 | 479 | 459 | 636 |
| 0.45in ² Cu | 577 | 498 | 476 | 673 |
| 0.5in ² Cu | 604 | 517 | 494 | 711 |
| 0.6in ² Cu | 652 | 548 | 523 | 781 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 303 | 284 | 275 | 333 |
| 0.25in ² Al. | 342 | 317 | 307 | 381 |
| 0.3in ² Al. | 381 | 349 | 338 | 429 |
| 0.35in ² Al. | 416 | 378 | 364 | 474 |
| 0.4in ² Al. | 444 | 400 | 385 | 510 |
| 0.45in ² Al | 471 | 421 | 405 | 546 |
| 0.5in ² Al. | 491 | 436 | 419 | 573 |
| 0.6in ² Al | 536 | 469 | 450 | 637 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID IN TREFOIL.

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Imperial sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 358 | 332 | 323 | 422 |
| 0.25in ² Cu | 401 | 368 | 356 | 481 |
| 0.3in ² Cu. | 444 | 401 | 387 | 539 |
| 0.35in ² Cu | 477 | 426 | 411 | 588 |
| 0.4in ² Cu | 511 | 451 | 434 | 636 |
| 0.45in ² Cu | 535 | 468 | 450 | 673 |
| 0.5in ² Cu | 560 | 486 | 466 | 711 |
| 0.6in ² Cu | 603 | 515 | 492 | 781 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 283 | 269 | 262 | 333 |
| 0.25in ² Al. | 319 | 300 | 292 | 381 |
| 0.3in ² Al. | 355 | 330 | 320 | 429 |
| 0.35in ² Al. | 387 | 357 | 345 | 474 |
| 0.4in ² Al. | 412 | 377 | 364 | 510 |
| 0.45in ² Al | 437 | 397 | 383 | 546 |
| 0.5in ² Al. | 455 | 411 | 396 | 573 |
| 0.6in ² Al | 496 | 441 | 424 | 637 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID IN TREFOIL.

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 410 | 387 | 377 | 422 |
| 0.25in ² Cu | 463 | 431 | 419 | 481 |
| 0.3in ² Cu. | 514 | 473 | 459 | 539 |
| 0.35in ² Cu | 555 | 505 | 489 | 588 |
| 0.4in ² Cu | 597 | 537 | 518 | 636 |
| 0.45in ² Cu | 626 | 560 | 539 | 673 |
| 0.5in ² Cu | 658 | 582 | 560 | 711 |
| 0.6in ² Cu | 712 | 621 | 596 | 781 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 325 | 312 | 304 | 333 |
| 0.25in ² Al. | 367 | 350 | 341 | 381 |
| 0.3in ² Al. | 410 | 387 | 376 | 429 |
| 0.35in ² Al. | 449 | 420 | 407 | 474 |
| 0.4in ² Al. | 480 | 445 | 431 | 510 |
| 0.45in ² Al | 510 | 470 | 455 | 546 |
| 0.5in ² Al. | 533 | 488 | 471 | 573 |
| 0.6in ² Al | 584 | 527 | 508 | 637 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID IN TREFOIL.

Summer SUSTAINED Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|------------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 333 | 313 | 305 | 422 |
| 0.25in ² Cu | 373 | 346 | 336 | 481 |
| 0.3in ² Cu. | 412 | 377 | 365 | 539 |
| 0.35in ² Cu | 442 | 400 | 387 | 588 |
| 0.4in ² Cu | 473 | 423 | 408 | 636 |
| 0.45in ² Cu | 495 | 439 | 422 | 673 |
| 0.5in ² Cu | 517 | 455 | 437 | 711 |
| 0.6in ² Cu | 556 | 481 | 461 | 781 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 264 | 254 | 247 | 333 |
| 0.25in ² Al. | 297 | 283 | 275 | 381 |
| 0.3in ² Al. | 330 | 311 | 302 | 429 |
| 0.35in ² Al. | 359 | 335 | 325 | 474 |
| 0.4in ² Al. | 382 | 354 | 342 | 510 |
| 0.45in ² Al | 405 | 372 | 359 | 546 |
| 0.5in ² Al. | 421 | 384 | 371 | 573 |
| 0.6in ² Al | 458 | 412 | 397 | 637 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID IN TREFOIL.

Summer CYCLIC Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 386 | 369 | 360 | 422 |
| 0.25in ² Cu | 434 | 410 | 399 | 481 |
| 0.3in ² Cu. | 482 | 449 | 436 | 539 |
| 0.35in ² Cu | 520 | 479 | 464 | 588 |
| 0.4in ² Cu | 557 | 508 | 491 | 636 |
| 0.45in ² Cu | 585 | 529 | 510 | 673 |
| 0.5in ² Cu | 613 | 550 | 530 | 711 |
| 0.6in ² Cu | 662 | 585 | 563 | 781 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 305 | 297 | 290 | 333 |
| 0.25in ² Al. | 345 | 333 | 325 | 381 |
| 0.3in ² Al. | 385 | 368 | 358 | 429 |
| 0.35in ² Al. | 420 | 398 | 387 | 474 |
| 0.4in ² Al. | 449 | 422 | 409 | 510 |
| 0.45in ² Al | 477 | 445 | 431 | 546 |
| 0.5in ² Al. | 497 | 461 | 447 | 573 |
| 0.6in ² Al | 544 | 498 | 480 | 637 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID IN TREFOIL.

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 352 | 328 | 319 | 422 |
| 0.25in ² Cu | 395 | 363 | 352 | 481 |
| 0.3in ² Cu. | 436 | 396 | 382 | 539 |
| 0.35in ² Cu | 469 | 420 | 406 | 588 |
| 0.4in ² Cu | 501 | 445 | 428 | 636 |
| 0.45in ² Cu | 525 | 462 | 444 | 673 |
| 0.5in ² Cu | 549 | 479 | 459 | 711 |
| 0.6in ² Cu | 591 | 507 | 485 | 781 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 279 | 266 | 259 | 333 |
| 0.25in ² Al. | 314 | 296 | 288 | 381 |
| 0.3in ² Al. | 349 | 326 | 316 | 429 |
| 0.35in ² Al. | 380 | 352 | 341 | 474 |
| 0.4in ² Al. | 405 | 372 | 359 | 510 |
| 0.45in ² Al | 429 | 391 | 377 | 546 |
| 0.5in ² Al. | 447 | 405 | 390 | 573 |
| 0.6in ² Al | 486 | 434 | 418 | 637 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID IN TREFOIL.

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 405 | 384 | 374 | 422 |
| 0.25in ² Cu | 456 | 427 | 415 | 481 |
| 0.3in ² Cu. | 507 | 468 | 454 | 539 |
| 0.35in ² Cu | 547 | 500 | 484 | 588 |
| 0.4in ² Cu | 587 | 531 | 513 | 636 |
| 0.45in ² Cu | 617 | 553 | 533 | 673 |
| 0.5in ² Cu | 647 | 575 | 554 | 711 |
| 0.6in ² Cu | 700 | 613 | 589 | 781 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 320 | 309 | 302 | 333 |
| 0.25in ² Al. | 362 | 347 | 338 | 381 |
| 0.3in ² Al. | 404 | 383 | 373 | 429 |
| 0.35in ² Al. | 442 | 415 | 403 | 474 |
| 0.4in ² Al. | 473 | 440 | 427 | 510 |
| 0.45in ² Al | 503 | 465 | 450 | 546 |
| 0.5in ² Al. | 524 | 482 | 466 | 573 |
| 0.6in ² Al | 574 | 521 | 502 | 637 |

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID FLAT SPACED.

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 411 | 400 | 390 | 473 |
| 0.25in ² Cu | 467 | 455 | 443 | 545 |
| 0.3in ² Cu. | 523 | 509 | 496 | 618 |
| 0.35in ² Cu | 568 | 554 | 539 | 680 |
| 0.4in ² Cu | 615 | 600 | 583 | 743 |
| 0.45in ² Cu | 650 | 634 | 616 | 792 |
| 0.5in ² Cu | 687 | 671 | 652 | 844 |
| 0.6in ² Cu | 761 | 745 | 723 | 949 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 322 | 313 | 305 | 371 |
| 0.25in ² Al. | 366 | 356 | 347 | 427 |
| 0.3in ² Al. | 411 | 399 | 389 | 486 |
| 0.35in ² Al. | 452 | 439 | 427 | 540 |
| 0.4in ² Al. | 485 | 471 | 458 | 585 |
| 0.45in ² Al | 518 | 504 | 490 | 631 |
| 0.5in ² Al. | 543 | 528 | 513 | 666 |
| 0.6in ² Al | 603 | 588 | 570 | 752 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID FLAT SPACED.

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 473 | 456 | 445 | 473 |
| 0.25in ² Cu | 541 | 520 | 507 | 545 |
| 0.3in ² Cu. | 608 | 585 | 569 | 618 |
| 0.35in ² Cu | 664 | 638 | 620 | 680 |
| 0.4in ² Cu | 722 | 693 | 673 | 743 |
| 0.45in ² Cu | 765 | 734 | 713 | 792 |
| 0.5in ² Cu | 811 | 779 | 756 | 844 |
| 0.6in ² Cu | 903 | 868 | 842 | 949 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 371 | 357 | 348 | 371 |
| 0.25in ² Al. | 424 | 407 | 396 | 427 |
| 0.3in ² Al. | 478 | 458 | 446 | 486 |
| 0.35in ² Al. | 528 | 505 | 491 | 540 |
| 0.4in ² Al. | 568 | 544 | 528 | 585 |
| 0.45in ² Al | 609 | 583 | 566 | 631 |
| 0.5in ² Al. | 640 | 612 | 593 | 666 |
| 0.6in ² Al | 715 | 684 | 663 | 752 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID FLAT SPACED.

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Imperial sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 391 | 387 | 379 | 473 |
| 0.25in ² Cu | 444 | 439 | 429 | 545 |
| 0.3in ² Cu. | 496 | 491 | 480 | 618 |
| 0.35in ² Cu | 538 | 534 | 521 | 680 |
| 0.4in ² Cu | 582 | 578 | 564 | 743 |
| 0.45in ² Cu | 615 | 611 | 595 | 792 |
| 0.5in ² Cu | 649 | 646 | 629 | 844 |
| 0.6in ² Cu | 718 | 716 | 697 | 949 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 307 | 303 | 296 | 371 |
| 0.25in ² Al. | 348 | 344 | 336 | 427 |
| 0.3in ² Al. | 390 | 386 | 376 | 486 |
| 0.35in ² Al. | 428 | 424 | 413 | 540 |
| 0.4in ² Al. | 459 | 454 | 443 | 585 |
| 0.45in ² Al | 490 | 485 | 473 | 631 |
| 0.5in ² Al. | 513 | 508 | 495 | 666 |
| 0.6in ² Al | 569 | 565 | 550 | 752 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID FLAT SPACED.

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 456 | 446 | 436 | 473 |
| 0.25in ² Cu | 520 | 508 | 496 | 545 |
| 0.3in ² Cu. | 584 | 571 | 556 | 618 |
| 0.35in ² Cu | 637 | 622 | 606 | 680 |
| 0.4in ² Cu | 692 | 675 | 657 | 743 |
| 0.45in ² Cu | 732 | 715 | 696 | 792 |
| 0.5in ² Cu | 776 | 757 | 737 | 844 |
| 0.6in ² Cu | 862 | 843 | 820 | 949 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 358 | 349 | 341 | 371 |
| 0.25in ² Al. | 408 | 398 | 388 | 427 |
| 0.3in ² Al. | 459 | 447 | 436 | 486 |
| 0.35in ² Al. | 506 | 493 | 480 | 540 |
| 0.4in ² Al. | 545 | 530 | 516 | 585 |
| 0.45in ² Al | 583 | 567 | 552 | 631 |
| 0.5in ² Al. | 612 | 595 | 579 | 666 |
| 0.6in ² Al | 683 | 664 | 646 | 752 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|---|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |
| Ratings taken from Crater for Gas cables. | |

TABLE R3 – sum

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID FLAT SPACED.

Summer SUSTAINED Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 361 | 362 | 355 | 473 |
| 0.25in ² Cu | 408 | 410 | 402 | 545 |
| 0.3in ² Cu. | 456 | 459 | 449 | 618 |
| 0.35in ² Cu | 494 | 498 | 487 | 680 |
| 0.4in ² Cu | 534 | 538 | 526 | 743 |
| 0.45in ² Cu | 563 | 568 | 555 | 792 |
| 0.5in ² Cu | 594 | 600 | 586 | 844 |
| 0.6in ² Cu | 656 | 664 | 649 | 949 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 283 | 284 | 278 | 371 |
| 0.25in ² Al. | 320 | 321 | 315 | 427 |
| 0.3in ² Al. | 358 | 360 | 352 | 486 |
| 0.35in ² Al. | 393 | 395 | 386 | 540 |
| 0.4in ² Al. | 421 | 423 | 413 | 585 |
| 0.45in ² Al | 449 | 452 | 441 | 631 |
| 0.5in ² Al. | 469 | 472 | 462 | 666 |
| 0.6in ² Al | 520 | 524 | 512 | 752 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID FLAT SPACED.

Summer CYCLIC Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 425 | 421 | 412 | 473 |
| 0.25in ² Cu | 484 | 479 | 469 | 545 |
| 0.3in ² Cu. | 543 | 538 | 525 | 618 |
| 0.35in ² Cu | 591 | 585 | 571 | 680 |
| 0.4in ² Cu | 641 | 635 | 619 | 743 |
| 0.45in ² Cu | 678 | 672 | 655 | 792 |
| 0.5in ² Cu | 717 | 711 | 693 | 844 |
| 0.6in ² Cu | 796 | 791 | 770 | 949 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 333 | 330 | 322 | 371 |
| 0.25in ² Al. | 379 | 375 | 367 | 427 |
| 0.3in ² Al. | 426 | 421 | 411 | 486 |
| 0.35in ² Al. | 470 | 464 | 453 | 540 |
| 0.4in ² Al. | 505 | 498 | 486 | 585 |
| 0.45in ² Al | 540 | 533 | 520 | 631 |
| 0.5in ² Al. | 566 | 559 | 545 | 666 |
| 0.6in ² Al | 631 | 623 | 607 | 752 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID FLAT SPACED.

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 380 | 378 | 370 | 473 |
| 0.25in ² Cu | 431 | 429 | 419 | 545 |
| 0.3in ² Cu. | 481 | 479 | 468 | 618 |
| 0.35in ² Cu | 522 | 520 | 508 | 680 |
| 0.4in ² Cu | 564 | 563 | 550 | 743 |
| 0.45in ² Cu | 595 | 595 | 580 | 792 |
| 0.5in ² Cu | 629 | 629 | 613 | 844 |
| 0.6in ² Cu | 695 | 696 | 679 | 949 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 298 | 296 | 289 | 371 |
| 0.25in ² Al. | 338 | 336 | 328 | 427 |
| 0.3in ² Al. | 378 | 376 | 367 | 486 |
| 0.35in ² Al. | 415 | 413 | 403 | 540 |
| 0.4in ² Al. | 445 | 443 | 432 | 585 |
| 0.45in ² Al | 475 | 473 | 461 | 631 |
| 0.5in ² Al. | 497 | 495 | 482 | 666 |
| 0.6in ² Al | 551 | 550 | 536 | 752 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE IMPREGNATED PRESSURE GAS CABLES LAID FLAT SPACED.

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| <u>Imperial sizes</u> | | PVC | Rigiduct | |
| <u>Copper conductors</u> | | | | |
| 0.2in ² Cu. | 445 | 437 | 427 | 473 |
| 0.25in ² Cu | 507 | 497 | 486 | 545 |
| 0.3in ² Cu. | 569 | 558 | 545 | 618 |
| 0.35in ² Cu | 620 | 608 | 593 | 680 |
| 0.4in ² Cu | 673 | 660 | 643 | 743 |
| 0.45in ² Cu | 712 | 699 | 680 | 792 |
| 0.5in ² Cu | 754 | 740 | 720 | 844 |
| 0.6in ² Cu | 838 | 824 | 801 | 949 |
| | | | | |
| <u>Aluminium conductors</u> | | | | |
| 0.2in ² Al. | 348 | 342 | 334 | 371 |
| 0.25in ² Al. | 397 | 389 | 380 | 427 |
| 0.3in ² Al. | 447 | 438 | 427 | 486 |
| 0.35in ² Al. | 493 | 482 | 470 | 540 |
| 0.4in ² Al. | 530 | 518 | 504 | 585 |
| 0.45in ² Al | 567 | 554 | 540 | 631 |
| 0.5in ² Al. | 595 | 582 | 566 | 666 |
| 0.6in ² Al | 664 | 649 | 631 | 752 |

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 85°C |

Ratings taken from Crater for Gas cables.

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Wet design)

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 458 | 414 | 401 | 506 |
| 240mm ² Copper | 526 | 468 | 452 | 592 |
| 300mm ² Copper | 587 | 514 | 495 | 670 |
| 400mm ² Copper | 658 | 565 | 542 | 795 |
| 500mm ² Copper | 734 | 617 | 589 | 875 |
| 630mm ² Copper | 811 | 668 | 636 | 992 |
| 800mm ² Copper | 884 | 718 | 680 | 1110 |
| 1000mm ² Copper | 949 | 764 | 721 | 1216 |
| 1000Smm ² Copper | 964 | 788 | 743 | 1262 |
| 1200Smm ² Copper | 1012 | 827 | 777 | 1346 |
| 1600Smm ² Copper | 1059 | 878 | 821 | 1440 |
| 2000Smm ² Copper | 1115 | 934 | 870 | 1565 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 469 | 424 | 410 | 530 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Wet design)

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 519 | 478 | 467 | 506 |
| 240mm ² Copper | 601 | 547 | 531 | 592 |
| 300mm ² Copper | 673 | 606 | 587 | 670 |
| 400mm ² Copper | 760 | 673 | 650 | 795 |
| 500mm ² Copper | 854 | 742 | 715 | 875 |
| 630mm ² Copper | 951 | 812 | 781 | 992 |
| 800mm ² Copper | 1045 | 883 | 846 | 1110 |
| 1000mm ² Copper | 1130 | 950 | 908 | 1216 |
| 1000Smm ² Copper | 1156 | 986 | 941 | 1262 |
| 1200Smm ² Copper | 1220 | 1043 | 993 | 1346 |
| 1600Smm ² Copper | 1289 | 1120 | 1062 | 1440 |
| 2000Smm ² Copper | 1371 | 1202 | 1135 | 1565 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 536 | 494 | 481 | 530 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 0.9°C m/W

Ground Ambient Temperature 10°C

Air Ambient Temperature 10°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Wet design)

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 430 | 393 | 382 | 506 |
| 240mm ² Copper | 494 | 444 | 429 | 592 |
| 300mm ² Copper | 550 | 487 | 470 | 670 |
| 400mm ² Copper | 615 | 534 | 514 | 795 |
| 500mm ² Copper | 684 | 581 | 557 | 875 |
| 630mm ² Copper | 754 | 628 | 599 | 992 |
| 800mm ² Copper | 820 | 673 | 640 | 1110 |
| 1000mm ² Copper | 886 | 720 | 682 | 1216 |
| 1000Smm ² Copper | 899 | 743 | 702 | 1262 |
| 1200Smm ² Copper | 943 | 777 | 733 | 1346 |
| 1600Smm ² Copper | 986 | 824 | 774 | 1440 |
| 2000Smm ² Copper | 1037 | 875 | 818 | 1565 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 440 | 402 | 390 | 530 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Wet design)

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 493 | 459 | 449 | 506 |
| 240mm ² Copper | 569 | 524 | 510 | 592 |
| 300mm ² Copper | 637 | 579 | 562 | 670 |
| 400mm ² Copper | 717 | 641 | 621 | 795 |
| 500mm ² Copper | 803 | 705 | 682 | 875 |
| 630mm ² Copper | 892 | 770 | 743 | 992 |
| 800mm ² Copper | 978 | 835 | 802 | 1110 |
| 1000mm ² Copper | 1066 | 903 | 865 | 1216 |
| 1000Smm ² Copper | 1089 | 936 | 896 | 1262 |
| 1200Smm ² Copper | 1148 | 987 | 942 | 1346 |
| 1600Smm ² Copper | 1210 | 1057 | 1006 | 1440 |
| 2000Smm ² Copper | 1284 | 1131 | 1073 | 1565 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 508 | 473 | 461 | 530 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|--|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables. | |

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Wet design)

Summer *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|-------------------------------------|--------------------------------|-------------------|----------|-----------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 406 | 374 | 364 | 506 |
| 240mm ² Copper | 465 | 421 | 409 | 592 |
| 300mm ² Copper | 517 | 461 | 446 | 670 |
| 400mm ² Copper | 577 | 505 | 487 | 795 |
| 500mm ² Copper | 640 | 549 | 528 | 875 |
| 630mm ² Copper | 705 | 592 | 567 | 992 |
| 800mm ² Copper | 765 | 633 | 604 | 1110 |
| 1000mm ² Copper | 818 | 671 | 638 | 1216 |
| 1000Smm ² Copper | 829 | 691 | 656 | 1262 |
| 1200Smm ² Copper | 869 | 723 | 684 | 1346 |
| 1600Smm ² Copper | 908 | 765 | 722 | 1440 |
| 2000Smm ² Copper | 953 | 811 | 762 | 1565 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 414 | 382 | 371 | 530 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

TABLE S3 - Sum

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Wet design)

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 470 | 441 | 432 | 506 |
| 240mm ² Copper | 541 | 502 | 489 | 592 |
| 300mm ² Copper | 605 | 554 | 539 | 670 |
| 400mm ² Copper | 680 | 612 | 594 | 795 |
| 500mm ² Copper | 760 | 672 | 651 | 875 |
| 630mm ² Copper | 842 | 732 | 707 | 992 |
| 800mm ² Copper | 921 | 791 | 762 | 1110 |
| 1000mm ² Copper | 992 | 847 | 814 | 1216 |
| 1000Smm ² Copper | 1012 | 877 | 842 | 1262 |
| 1200Smm ² Copper | 1065 | 924 | 884 | 1346 |
| 1600Smm ² Copper | 1123 | 987 | 943 | 1440 |
| 2000Smm ² Copper | 1189 | 1054 | 1003 | 1565 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 483 | 454 | 443 | 530 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Wet design)

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|----------------------------------|--------------------------------|----------------|-----|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| PVC | | Rigiduct | | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 427 | 391 | 380 | 506 |
| 240mm ² Copper | 489 | 441 | 427 | 592 |
| 300mm ² Copper | 545 | 483 | 467 | 670 |
| 400mm ² Copper | 609 | 530 | 510 | 795 |
| 500mm ² Copper | 677 | 577 | 553 | 875 |
| 630mm ² Copper | 746 | 623 | 595 | 992 |
| 800mm ² Copper | 811 | 667 | 635 | 1110 |
| 1000mm ² Copper | 868 | 708 | 671 | 1216 |
| 1000Smm ² Copper | 881 | 730 | 691 | 1262 |
| 1200Smm ² Copper | 924 | 763 | 721 | 1346 |
| 1600Smm ² Copper | 965 | 809 | 761 | 1440 |
| 2000Smm ² Copper | 1014 | 859 | 805 | 1565 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 436 | 400 | 388 | 530 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN TREFOIL. (Wet design)

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|----------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 491 | 458 | 448 | 506 |
| 240mm ² Copper | 566 | 522 | 508 | 592 |
| 300mm ² Copper | 634 | 577 | 561 | 670 |
| 400mm ² Copper | 713 | 638 | 619 | 795 |
| 500mm ² Copper | 799 | 702 | 679 | 875 |
| 630mm ² Copper | 887 | 766 | 739 | 992 |
| 800mm ² Copper | 972 | 830 | 798 | 1110 |
| 1000mm ² Copper | 1048 | 890 | 853 | 1216 |
| 1000Smm ² Copper | 1070 | 922 | 883 | 1262 |
| 1200Smm ² Copper | 1127 | 972 | 929 | 1346 |
| 1600Smm ² Copper | 1188 | 1040 | 991 | 1440 |
| 2000Smm ² Copper | 1260 | 1112 | 1056 | 1565 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 506 | 472 | 460 | 530 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in trefoil formation & solidly bonded.

| | |
|--|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables. | |

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN FLAT SPACED. (Wet design)

Winter *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|------------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 498 | 483 | 471 | 568 |
| 240mm ² Copper | 582 | 563 | 549 | 672 |
| 300mm ² Copper | 660 | 638 | 621 | 770 |
| 400mm ² Copper | 756 | 731 | 711 | 897 |
| 500mm ² Copper | 870 | 839 | 816 | 1054 |
| 630mm ² Copper | 997 | 961 | 933 | 1233 |
| 800mm ² Copper | 1130 | 1089 | 1056 | 1428 |
| 1000mm ² Copper | 1256 | 1210 | 1173 | 1612 |
| 1000Smm ² Copper | 1336 | 1280 | 1239 | 1714 |
| 1200Smm ² Copper | 1447 | 1388 | 1343 | 1874 |
| 1600Smm ² Copper | 1555 | 1483 | 1434 | 2035 |
| 2000Smm ² Copper | 1713 | 1623 | 1567 | 2295 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 512 | 495 | 482 | 598 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables.

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Wet design)

Winter *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 572 | 548 | 536 | 568 |
| 240mm ² Copper | 672 | 643 | 628 | 672 |
| 300mm ² Copper | 766 | 732 | 715 | 770 |
| 400mm ² Copper | 884 | 843 | 823 | 897 |
| 500mm ² Copper | 1024 | 975 | 950 | 1054 |
| 630mm ² Copper | 1181 | 1123 | 1093 | 1233 |
| 800mm ² Copper | 1348 | 1283 | 1246 | 1428 |
| 1000mm ² Copper | 1507 | 1436 | 1392 | 1612 |
| 1000Smm ² Copper | 1604 | 1520 | 1473 | 1714 |
| 1200Smm ² Copper | 1744 | 1656 | 1603 | 1874 |
| 1600Smm ² Copper | 1888 | 1787 | 1731 | 2035 |
| 2000Smm ² Copper | 2097 | 1973 | 1910 | 2295 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 594 | 567 | 553 | 598 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 0.9°C m/W |
| Ground Ambient Temperature | 10°C |
| Air Ambient Temperature | 10°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables | |

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Wet design)

Spring *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|------------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 470 | 462 | 452 | 568 |
| 240mm ² Copper | 548 | 538 | 526 | 672 |
| 300mm ² Copper | 621 | 609 | 595 | 770 |
| 400mm ² Copper | 710 | 697 | 680 | 897 |
| 500mm ² Copper | 815 | 799 | 779 | 1054 |
| 630mm ² Copper | 932 | 913 | 889 | 1233 |
| 800mm ² Copper | 1054 | 1033 | 1005 | 1428 |
| 1000mm ² Copper | 1170 | 1146 | 1114 | 1612 |
| 1000Smm ² Copper | 1245 | 1211 | 1177 | 1714 |
| 1200Smm ² Copper | 1348 | 1312 | 1275 | 1874 |
| 1600Smm ² Copper | 1448 | 1400 | 1359 | 2035 |
| 2000Smm ² Copper | 1592 | 1529 | 1482 | 2295 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 482 | 473 | 462 | 598 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Wet design)

Spring *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 546 | 530 | 519 | 568 |
| 240mm ² Copper | 641 | 621 | 607 | 672 |
| 300mm ² Copper | 730 | 706 | 691 | 770 |
| 400mm ² Copper | 840 | 812 | 794 | 897 |
| 500mm ² Copper | 971 | 937 | 915 | 1054 |
| 630mm ² Copper | 1117 | 1078 | 1052 | 1233 |
| 800mm ² Copper | 1272 | 1229 | 1197 | 1428 |
| 1000mm ² Copper | 1420 | 1373 | 1335 | 1612 |
| 1000Smm ² Copper | 1512 | 1454 | 1412 | 1714 |
| 1200Smm ² Copper | 1643 | 1582 | 1535 | 1874 |
| 1600Smm ² Copper | 1777 | 1703 | 1655 | 2035 |
| 2000Smm ² Copper | 1971 | 1877 | 1823 | 2295 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 566 | 547 | 535 | 598 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|---|------------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.05°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables | |

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Wet design)

Summer SUSTAINED Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|------------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 442 | 440 | 431 | 568 |
| 240mm ² Copper | 514 | 511 | 501 | 672 |
| 300mm ² Copper | 582 | 578 | 566 | 770 |
| 400mm ² Copper | 664 | 661 | 647 | 897 |
| 500mm ² Copper | 761 | 756 | 739 | 1054 |
| 630mm ² Copper | 869 | 863 | 843 | 1233 |
| 800mm ² Copper | 981 | 974 | 951 | 1428 |
| 1000mm ² Copper | 1087 | 1079 | 1052 | 1612 |
| 1000Smm ² Copper | 1157 | 1140 | 1112 | 1714 |
| 1200Smm ² Copper | 1252 | 1234 | 1203 | 1874 |
| 1600Smm ² Copper | 1345 | 1315 | 1281 | 2035 |
| 2000Smm ² Copper | 1477 | 1433 | 1395 | 2295 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 452 | 449 | 440 | 598 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

Maximum depth of lay 1m

Soil Thermal Resistivity (g) 1.2°C m/W

Ground Ambient Temperature 15°C

Air Ambient Temperature 15°C

Maximum Conductor Temperature 90°C

Ratings based on Crater for HV polymeric cables

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Wet design)

Summer *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 518 | 509 | 499 | 568 |
| 240mm ² Copper | 608 | 595 | 584 | 672 |
| 300mm ² Copper | 691 | 676 | 663 | 770 |
| 400mm ² Copper | 794 | 778 | 761 | 897 |
| 500mm ² Copper | 916 | 896 | 876 | 1054 |
| 630mm ² Copper | 1052 | 1029 | 1005 | 1233 |
| 800mm ² Copper | 1196 | 1170 | 1142 | 1428 |
| 1000mm ² Copper | 1333 | 1305 | 1271 | 1612 |
| 1000Smm ² Copper | 1419 | 1381 | 1345 | 1714 |
| 1200Smm ² Copper | 1541 | 1501 | 1461 | 1874 |
| 1600Smm ² Copper | 1666 | 1614 | 1573 | 2035 |
| 2000Smm ² Copper | 1844 | 1774 | 1728 | 2295 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 536 | 524 | 513 | 598 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|---|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.2°C m/W |
| Ground Ambient Temperature | 15°C |
| Air Ambient Temperature | 15°C |
| Maximum Conductor Temperature | 90°C |
| Ratings based on Crater for HV polymeric cables | |

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID IN FLAT SPACED. (Wet design)

Autumn *SUSTAINED* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | SUSTAINED CURRENT RATINGS-AMPS | | | |
|------------------------------------|--------------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 463 | 457 | 448 | 568 |
| 240mm ² Copper | 540 | 532 | 521 | 672 |
| 300mm ² Copper | 611 | 602 | 589 | 770 |
| 400mm ² Copper | 699 | 689 | 673 | 897 |
| 500mm ² Copper | 802 | 789 | 771 | 1054 |
| 630mm ² Copper | 916 | 902 | 879 | 1233 |
| 800mm ² Copper | 1036 | 1019 | 993 | 1428 |
| 1000mm ² Copper | 1149 | 1130 | 1100 | 1612 |
| 1000Smm ² Copper | 1223 | 1195 | 1163 | 1714 |
| 1200Smm ² Copper | 1324 | 1294 | 1259 | 1874 |
| 1600Smm ² Copper | 1422 | 1380 | 1341 | 2035 |
| 2000Smm ² Copper | 1563 | 1506 | 1462 | 2295 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 475 | 468 | 457 | 598 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables

132kV SINGLE CORE EPR INSULATED COPPER WIRE WITH M.D.P.E. OUTER SHEATH CABLES, LAID FLAT SPACED. (Wet design)

Autumn *CYCLIC* Current Ratings

| SIZE AND TYPE OF CABLE CONDUCTOR | CYCLIC CURRENT RATINGS-AMPS | | | |
|------------------------------------|-----------------------------|----------------|----------|--------------|
| | CABLE IN GROUND | CABLE IN DUCTS | | CABLE IN AIR |
| | | PVC | Rigiduct | |
| <u>Metric sizes</u> | | | | |
| <u>Copper conductors</u> | | | | |
| 185mm ² Copper | 540 | 526 | 516 | 568 |
| 240mm ² Copper | 634 | 616 | 603 | 672 |
| 300mm ² Copper | 721 | 700 | 686 | 770 |
| 400mm ² Copper | 830 | 806 | 788 | 897 |
| 500mm ² Copper | 958 | 929 | 908 | 1054 |
| 630mm ² Copper | 1102 | 1069 | 1043 | 1233 |
| 800mm ² Copper | 1255 | 1217 | 1186 | 1428 |
| 1000mm ² Copper | 1400 | 1359 | 1322 | 1612 |
| 1000Smm ² Copper | 1490 | 1439 | 1399 | 1714 |
| 1200Smm ² Copper | 1619 | 1565 | 1521 | 1874 |
| 1600Smm ² Copper | 1751 | 1684 | 1638 | 2035 |
| 2000Smm ² Copper | 1941 | 1854 | 1803 | 2295 |
| <u>Aluminium conductors</u> | | | | |
| 300mm ² Al | 559 | 543 | 531 | 598 |

Note: - S = segmental conductor stranding.

Parameters

Cables laid in flat spaced (2D) formation & cross bonded.

| | |
|-------------------------------|-----------|
| Maximum depth of lay | 1m |
| Soil Thermal Resistivity (g) | 1.1°C m/W |
| Ground Ambient Temperature | 12°C |
| Air Ambient Temperature | 12°C |
| Maximum Conductor Temperature | 90°C |

Ratings based on Crater for HV polymeric cables

APPENDIX A

SUPERSEDED DOCUMENTATION

This document supersedes ST:SD8B/2 dated September 2003 which should now be withdrawn.

APPENDIX B

ASSOCIATED DOCUMENTATION

ST: CA6A/2 - Relating to the Installation of Underground Cables

APPENDIX C

IMPACT ON COMPANY POLICY

This Standard Technique has been updated to add all four seasons to the cable rating document instead of just having one season as given in the previous document. In addition the document has been broken up into manageable parts, with each part being for a particular voltage level.

APPENDIX D

IMPLEMENTATION OF POLICY

This Standard Technique shall be communicated to all relevant WPD Planning and Control staff at the next Team Briefing by the relevant Team Manager.

APPENDIX E

KEY WORDS

132kV, XLPE, EPR, Fluid filled, Group Derating, Sustained Rating, Cyclic Rating, Laid Direct Rating, Duct Rating, Air Rating.